

# Weierstraß-Institut für Angewandte Analysis und Stochastik

im Forschungsverbund Berlin e.V.

Preprint

ISSN 0946 – 8633

## Stable Crank-Nicolson Discretisation for Incompressible Miscible Displacement Problems of Low Regularity

Max Jensen<sup>1</sup>, Rüdiger Müller<sup>2</sup>

submitted: 8. Oct. 2009

<sup>1</sup> Department of Mathematical Sciences  
University of Durham  
South Road  
Durham DH1 3LE  
United Kingdom  
E-Mail: m.p.j.jensen@durham.ac.uk

<sup>2</sup> Weierstraß-Institut  
für Angewandte Analysis  
und Stochastik  
Mohrenstr. 39  
10117 Berlin  
Germany  
E-Mail: mueller@wias-berlin.de

No. 1450  
Berlin 2009



---

2000 *Mathematics Subject Classification.* 65M60, 65M12, 76S05.

*Key words and phrases.* discontinuous Galerkin, low regularity, Crank-Nicolson.

Edited by  
Weierstraß-Institut für Angewandte Analysis und Stochastik (WIAS)  
Mohrenstraße 39  
10117 Berlin  
Germany

Fax: + 49 30 2044975  
E-Mail: [preprint@wias-berlin.de](mailto:preprint@wias-berlin.de)  
World Wide Web: <http://www.wias-berlin.de/>

ABSTRACT. In this article we study the numerical approximation of incompressible miscible displacement problems with a linearised Crank-Nicolson time discretisation, combined with a mixed finite element and discontinuous Galerkin method. At the heart of the analysis is the proof of convergence under low regularity requirements. Numerical experiments demonstrate that the proposed method exhibits second-order convergence for smooth and robustness for rough problems.

## 1. INTRODUCTION AND INITIAL BOUNDARY VALUE PROBLEM

Mathematical models which describe the miscible displacement of fluids are of particular economical relevance in the recovery of oil in underground reservoirs by fluids which mix with oil. They also play a significant role in CO<sub>2</sub> stratification.

This publication extends the analysis of [1], which studies the discretisation of miscible displacement under low regularity. Unlike to [1] which is based on a first-order implicit Euler time-step (leading to a nonlinear system of equations in each time step), here we examine the discretisation in time by a linearised second-order Crank-Nicolson scheme. Crucially, the new, more efficient method inherits stability under low regularity. Like in [1], the concentration equation is approximated with a discontinuous Galerkin method, while Darcy's law and the incompressibility condition is formulated as a mixed method. High-order time-stepping for miscible displacement under low regularity has recently also been addressed in [4], however, with a continuous Galerkin discretisation in space and discontinuous Galerkin in time. We refer for an outline of the general literature to [1, 2, 3, 4].

**Definition 1** (Weak Formulation). *A triple  $(u, p, c)$  in*

$$L^\infty(0, T; H_N(\operatorname{div}; \Omega)) \times L^\infty(0, T; L_0^2(\Omega)) \times (L^2(0, T; H^1(\Omega)) \cap H^1(0, T; H^2(\Omega)^*))$$

*is called weak solution of the incompressible miscible flow problem if*

$$(W1) \quad \text{for } t \in (0, T), v \in H_N(\operatorname{div}; \Omega) \text{ and } q \in L_0^2(\Omega)$$

$$\begin{aligned} (\mu(c) \mathbb{K}^{-1} u, v) - (p, \operatorname{div} v) &= (\rho(c) g, v) \\ (q, \operatorname{div} u) &= (q^I - q^P, q). \end{aligned}$$

$$(W2) \quad \text{for all } w \in \mathcal{D}(0, T; H^2(\Omega))$$

$$\int_0^T -(\phi c, \partial_t w) + (\mathbb{D}(u) \nabla c, \nabla w) + (u \cdot \nabla c, w) + (q^I c, w) - (\hat{c} q^I, w) dt = 0.$$

$$(W3) \quad c(0, \cdot) = c_0 \text{ in } H^2(\Omega)^*.$$

For the data qualification we refer to condition (A1)–(A8) in [1] and for the physical interpretation of the system to [1, 2, 3]. We point out that  $\mathbb{D}$  grows proportionally with  $u$ :

$$d_\circ(1 + |u|)|\xi|^2 \leq \xi^\top \mathbb{D}(u, x) \xi \leq d^\circ(1 + |u|)|\xi|^2, \quad u, \xi \in \mathbb{R}^d, x \in \Omega.$$

Thus  $\mathbb{D}$  is in general unbounded on Lipschitz domains  $\Omega$  and in the presence of discontinuous coefficients, which are permitted in this paper.

## 2. THE FINITE ELEMENT METHOD

We compactly recall the definition of the finite element spaces from [1]. Let  $0 = t_0 < t_1 < \dots < t_M = T$  be a partition of the time interval  $[0, T]$ . Let  $k_j := t_j - t_{j-1}$  and  $d_t a^j := k_j^{-1}(a^j - a^{j-1})$ . We consider meshes  $\mathcal{T}$  of  $\Omega$  with elements  $K$  and set  $h_K := \text{diam}(K)$ . We denote by  $\mathcal{S}^s(\mathcal{T})$  the space of elementwise polynomial functions of total or partial degree  $s$ . For  $w_h \in \mathcal{S}^s(\mathcal{T})$  the function  $\nabla_h w_h$  is defined through  $(\nabla_h w_h)|_K = \nabla(w_h|_K)$ . The sets of interior and boundary faces are  $\mathcal{E}_\Omega(\mathcal{T})$  and  $\mathcal{E}_{\partial\Omega}(\mathcal{T})$ . We set  $\mathcal{E}(\mathcal{T}) = \mathcal{E}_\Omega(\mathcal{T}) \cup \mathcal{E}_{\partial\Omega}(\mathcal{T})$  and assign to each  $E \in \mathcal{E}(\mathcal{T})$  its diameter  $h_E$ . We denote jump and the average operators by  $[\cdot]$  and  $\{\cdot\}$ . The concentration  $c$  is discretised at time  $j$  on the mesh  $\mathcal{T}_c^j$  or simply by  $\mathcal{T}^j$ . The approximation space for the variable  $c$  at time step  $j$  is denoted by  $\mathcal{S}_c^j$ . Often we abbreviate  $\mathcal{E}^j := \mathcal{E}(\mathcal{T}_c^j)$ ,  $\mathcal{E}_\Omega^j := \mathcal{E}_\Omega(\mathcal{T}_c^j)$ ,  $\mathcal{E}_{\partial\Omega}^j := \mathcal{E}_{\partial\Omega}(\mathcal{T}_c^j)$ . We denote the Raviart-Thomas space of order  $\ell$  by  $\mathcal{RT}^\ell(\mathcal{T}_u^j)$ . The approximation spaces of  $u$  and  $p$  are  $\mathcal{S}_u^j := \mathcal{RT}^\ell(\mathcal{T}_u^j) \cap H_N(\text{div}; \Omega)$  and  $\mathcal{S}_p^j := \mathcal{S}^\ell(\mathcal{T}_u^j) \cap L_0^2(\Omega)$ . We frequently use the global mesh size and time step  $h^j := \max_{K \in \mathcal{T}_c^j \cup \mathcal{T}_u^j} h_K$ ,  $\tilde{h} := \max_{0 \leq j \leq M} h^j$ ,  $\tilde{k} := \max_{0 \leq j \leq M} k^j$  as well as to  $\mathcal{S}_u = \prod_{j=1}^M \mathcal{S}_u^j$ ,  $\mathcal{S}_p = \prod_{j=1}^M \mathcal{S}_p^j$ ,  $\mathcal{S}_c = \prod_{j=0}^M \mathcal{S}_c^j$ . In addition we impose conditions (M1)–(M5) of [1] which are on shape-regularity, boundedness of the polynomial degree, control  $\|v_h\|_{L^4} \lesssim \|v_h\|_{H^1}$  and the structure of hanging nodes.

To deal with discontinuous coefficients and the time derivative, we substitute  $\mathbb{D}$  by  $\mathbb{D}_h : L^2(\Omega)^d \rightarrow \mathcal{S}^s(\mathcal{T}_c, \mathbb{R}^{d \times d})$ ,  $v \mapsto \Pi_{\mathcal{T}} \circ \mathbb{D}(v, \cdot)$  where the  $\Pi_{\mathcal{T}}$  are projections such that  $\|\Pi_{\mathcal{T}} D\|_K \lesssim \|D\|_K$ . Given quantities  $a^j$ ,  $a^{j-1}$  and  $a^{j-2}$  at times  $t_j$ ,  $t_{j-1}$ ,  $t_{j-2}$ , we denote  $\bar{a}^j = \frac{1}{2}a^j + \frac{1}{2}a^{j-1}$  and  $\check{a} = \frac{3}{2}a^{j-1} - \frac{1}{2}a^{j-2}$ .

The diffusion term of the concentration equation is discretised by the symmetric interior penalty discontinuous Galerkin method: Given  $c_h, w_h \in \mathcal{S}_c^j$ ,  $u_h \in \mathcal{S}_u^j$ , we set

$$\begin{aligned} B_d(c_h, w_h; u_h) &:= (\mathbb{D}_h^j(u_h) \nabla_h c_h, \nabla_h w_h) - ([c_h], \{\mathbb{D}_h^j(u_h) \nabla_h w_h\})_{\mathcal{E}_\Omega^j} \\ &\quad - ([w_h], \{\mathbb{D}_h^j(u_h) \nabla_h c_h\})_{\mathcal{E}_\Omega^j} + (\sigma^2 [c_h], [w_h])_{\mathcal{E}_\Omega^j} \end{aligned}$$

where  $\sigma$  is chosen sufficiently large to ensure coercivity of  $B_d$ , cf. [1]. The convection, injection and production terms are represented by

$$\begin{aligned} (1\mathcal{B}_{cq}(c_h, w_h; u_h) &:= 1/2 \left( (u_h \nabla_h c_h, w_h) - (u_h c_h, \nabla_h w_h) + ((\bar{q}^I + \bar{q}^P) c_h, w_h) \right. \\ &\quad \left. + \sum_{K \in \mathcal{T}^j} (c_h^+, (u_h \cdot n_K)_+ [w_h]_K)_{\partial K \setminus \partial\Omega} - ((u_h \cdot n_K)_- [c_h]_K, w_h^+)_{\partial K \setminus \partial\Omega} \right), \end{aligned}$$

where  $(u_h \cdot n)_+ := \max\{u_h \cdot n, 0\}$  and  $(u_h \cdot n)_- := \min\{u_h \cdot n, 0\}$ . We set  $B = B_d + B_{cq}$ . **ALGORITHM** ( $A^{dG}$ ). Choose  $c_h^j \in \mathcal{S}_c^j$  for  $j = 0, 1$ . Given  $c_h^j$ , find  $(u_h^j, p_h^j) \in \mathcal{S}_u^j \times \mathcal{S}_p^j$  such that

$$(2) \quad \begin{aligned} (\mu(c_h^j) \mathbb{K}^{-1} u_h^j, v_h) - (p_h^j, \text{div } v_h) &= (\rho(c_h^j) g, v_h), \\ (q_h, \text{div } u_h^j) &= ((q^I - q^P)^j, q_h). \end{aligned}$$

For  $2 \leq j \leq M$  find  $c_h^j \in \mathcal{S}_c^j$  such that, for all  $w_h \in \mathcal{S}_c^j$ ,

$$(3) \quad (\phi d_t c_h^j, w_h) + B(\bar{c}_h^j, w_h; \check{u}_h^j) = (\tilde{c}^j \bar{q}^{Ij}, w_h)$$

and solve (2) to obtain  $(u_h^j, p_h^j) \in \mathfrak{S}_u^j \times \mathfrak{S}_p^j$ .

The algorithm only requires the solution of a *linear* system in each time step. The iterate  $c_h^1$  can be computed with an implicit Euler method and fine time steps. The use of extrapolated values such as  $\check{u}_h^j$  is classical, e.g. see [5, p. 218].

### 3. UNCONDITIONAL WELL-POSEDNESS, BOUNDEDNESS AND CONVERGENCE

Given  $c_h^{j-1}$  and  $c_h^{j-2}$ , there exists a solution  $c_h^j \in \mathfrak{S}_u^j$  of (3) because the bilinear form  $B$  is positive definite. For  $t \in [t_{j-1}, t_j]$ , let  $\tilde{c}_h(t, \cdot) := \frac{t-t_{j-1}}{k_j} c_h^j + \frac{t_j-t}{k_j} c_h^{j-1}$ . Then  $\partial_t \tilde{c}_h(t, \cdot) = d_t c_h^j(\cdot)$ . We interpret elements of  $\mathfrak{S}_u$ ,  $\mathfrak{S}_p$  and  $\mathfrak{S}_c$  as time-dependent functions with stepwise constant values. Let

$$|c_h|_{\check{u}_h}^2 := (\mathbb{D}_h(\check{u}_h) \nabla_h c_h, \nabla_h c_h) + (\sigma^2 [c_h], [c_h])_{\mathcal{E}_\Omega^j} + (|\check{u}_h \cdot n_{\mathcal{E}^j}| [c_h], [c_h])_{\mathcal{E}_\Omega^j}.$$

**Theorem 1.** *Let  $\rho^\circ = \|\rho\|_\infty$ . There exists a constant  $C > 0$  such that*

$$(4) \quad \|\check{u}_h^j\| + \|\operatorname{div} \check{u}_h^j\| + \|\check{p}_h^j\| \lesssim (\|\rho^\circ g\| + \|\check{q}^I - \check{q}^P\|)$$

holds for all  $j = 2, 3, \dots, M$ . Equally we have

$$(5) \quad \|\phi^{1/2} c_h^j\|^2 + \int_{t_1}^{t_j} |\bar{c}_h|_{\check{u}_h^j}^2 dt \leq \|\phi^{1/2} c_h^1\|^2 + \int_{t_1}^{t_j} \|(\bar{q}^{I^i})^{1/2} \bar{c}^i\|^2 dt$$

for all  $j = 2, 3, \dots, M$ .

*Proof.* The stability of  $u^{j-1}$ ,  $u^{j-2}$ ,  $p^{j-1}$ ,  $p^{j-2}$  follows from a classical inf-sup argument. This implies stability of  $\check{u}^j$  and  $\check{p}^j$ . We choose  $w_h = \bar{c}_h^i$  in (3) to verify that

$$\begin{aligned} d_t \|\phi^{1/2} c_h^i\|^2 + |\bar{c}_h^i|_{\check{u}_h^i}^2 + \|(\bar{q}^I + \bar{q}^P)^{1/2} \bar{c}_h^i\|^2 \\ \leq 2(\phi d_t c_h^i, \bar{c}_h^i) + 2B(\bar{c}_h^i, \bar{c}_h^i; \check{u}_h^i) = 2(\bar{c}^i \bar{q}^{I^i}, \bar{c}_h^i). \end{aligned}$$

The Cauchy-Schwarz inequality, multiplication by  $k_i$  and summation over  $i$  give

$$\|\phi^{1/2} c_h^j\|^2 + \sum_{i=2}^j k_i |\bar{c}_h^i|_{\check{u}_h^i}^2 \leq \|\phi^{1/2} c_h^1\|^2 + \sum_{i=2}^j k_i \|(\bar{q}^{I^i})^{1/2} \bar{c}^i\|^2$$

for all  $j = 2, 3, \dots, M$ . □

For simplicity the next theorem is stated assuming meshes are not adapted in time. For the extension to changing meshes consult [1]. However, observe that the discretisation with the implicit Euler method gives additional stability in  $k_i \|\phi^{1/2} d_t c_h^i\|^2$ , which allows to change meshes more rapidly.

**Theorem 2.** *The time derivative  $\partial_t \tilde{c}_h$  belongs to  $L^2(t_1, T; H^2(\Omega)^*)$  and*

$$\|\partial_t \tilde{c}_h\|_{L^2(t_1, T; H^2(\Omega)^*)} = \|d_t c_h\|_{L^2(t_1, T; H^2(\Omega)^*)} \lesssim 1,$$

independently of the mesh size and time step.

*Proof.* Let  $w_h \in \mathcal{S}_c^j$ . We recall from [1]

$$\begin{aligned} B_d(c_h^j, w_h; \check{u}_h^j) &\lesssim (1 + \|\check{u}_h^j\|^{1/2}) |c_h^j|_{\mathcal{T}^j} (\|\nabla_h w_h\|_{L^4(\Omega)} + \|w_h\|_{L^4(\Omega)} + \|\sigma[w_h]\|_{\mathcal{E}_\Omega^j}), \\ B_{cq}(c_h^j, w_h; \check{u}_h^j) &\lesssim (1 + \|\check{u}_h^j\|^{1/2}) |c_h^j|_{\mathcal{T}^j} (\|\nabla_h w_h\| + \|w_h\|_{L^4(\Omega)} + \|\sigma[w_h]\|_{\mathcal{E}_\Omega^j}), \\ \|\sigma[w_h]\|_{\mathcal{E}_\Omega^j}^2 &\lesssim (1 + \|\check{u}_h^j\|) \tilde{h}^{1/2} \|w\|_{H^2(\Omega)}^2. \end{aligned}$$

With  $L^2$ -orthogonality and

$$\begin{aligned} \int_{t_1}^T (\phi d_t c_h^j, w) dt &= \int_{t_1}^T (\tilde{c}^j \bar{q}^{I^j}, w_h) - B(\bar{c}_h^j, w_h; \check{u}_h^j) dt \\ &\lesssim \int_0^T (1 + \|\check{u}_h^j\|) (1 + \|\check{u}_h^j\|_{H(\text{div}; \Omega)}^{1/2}) |c_h^j|_{w_h^j} \|w\|_{H^2(\Omega)} dt \\ &\lesssim \|w\|_{L^2(0, T; H^2(\Omega))} \end{aligned}$$

one completes the proof.  $\square$

**Theorem 3.** *Let  $(u_i, p_i, c_i)_{i \in \mathbb{N}}$  be a sequence of numerical solutions with  $(\tilde{h}_i, \tilde{k}_i) \rightarrow 0$  as  $i \rightarrow \infty$ . Then there exists  $c \in L^2(0, T; H^1(\Omega)) \cap H^1(0, T; H^2(\Omega)^*)$  such that, after passing to a subsequence,  $c_i \rightarrow c$  in  $L^2(\Omega_T)$ ,  $\partial_t \tilde{c}_i \rightarrow \partial_t c$  in  $L^2(0, T; H^2(\Omega)^*)$  and  $\nabla c_i \rightarrow \nabla c$  in  $L^2(0, T; H^{-1}(\Omega))$ . If  $c_i^0, c_i^1 \rightarrow c_0$  in  $H^2(\Omega)^*$  then  $c$  satisfies (W3).*

The proof is, up to the treatment of the initial conditions, exactly as in [1]. It is based on the Aubin-Lions theorem and the embedding

$$\mathcal{S}^s(\mathcal{T}_i) \hookrightarrow [\text{BV}(\Omega) \cap L^4(\Omega), L^4(\Omega)]_{1/2} \hookrightarrow L^2(\Omega),$$

where  $[\cdot, \cdot]_\theta$  denotes the complex method of interpolation.

**Theorem 4.** *Let  $(u_i, p_i, c_i)_{i \in \mathbb{N}}$  be numerical solutions with  $(\tilde{h}_i, \tilde{k}_i) \rightarrow 0$  and  $c_i \rightarrow c$  in  $L^2(\Omega_T)$  as  $i \rightarrow \infty$ . There exists  $u \in L^\infty(0, T; H_N(\text{div}; \Omega))$  and  $p \in L^\infty(0, T; L_0^2(\Omega))$  such that, after passing to a subsequence,  $u_i \rightarrow u$  in  $H_N(\text{div}; \Omega)$  and  $p_i \rightarrow p$  in  $L_0^2(\Omega)$  as  $(\tilde{h}_i, \tilde{k}_i) \rightarrow 0$ . Furthermore,  $(u, p, c)$  satisfies (W1).*

*Proof.* Use Strang's lemma, for details see [1].  $\square$

We interpret  $\check{u}_i$  as piecewise constant function in time, attaining in  $(t_{j-1}, t_j]$  the value  $\frac{3}{2}u(t^{j-1}) - \frac{1}{2}u(t^{j-2})$ .

**Theorem 5.** *Let  $(u_i, p_i, c_i)_{i \in \mathbb{N}}$  be numerical solutions with  $(\tilde{h}_i, \tilde{k}_i) \rightarrow 0$  as  $i \rightarrow \infty$  and let  $u \in L^\infty(0, T; H_N(\text{div}; \Omega))$  and  $c \in L^2(0, T; H^1(\Omega)) \cap H^1(0, T; H^2(\Omega)^*)$  be a limit of  $(u_i, c_i)_i$  in the sense of Theorems 3 and 4. Then  $(u, c)$  satisfies (W2).*

*Proof.* Let  $v \in \mathcal{D}(0, T; \mathcal{C}^\infty(\Omega))$  and  $v_i(t) \in \mathcal{S}_c^j$  an approximation to  $v(t)$  in  $(t_{j-1}, t_j]$ . Using the strong convergence of  $(\nabla_h v_i)_i$  in  $L^\infty(\Omega_T)^d$  and the weak convergence of the lifted gradient of  $c_i$  in  $L^2(\Omega_T)^d$ , we find

$$\int_{t_1}^T (\nabla c, \mathbb{D}(u) \nabla v) dt = \lim_{i \rightarrow \infty} \int_{t_1}^T (\nabla_h c_i, \mathbb{D}_h(\check{u}_i) \nabla_h v_i) - ([c_i], \{\mathbb{D}_h(\check{u}_i) \nabla_h v_i\})_{\mathcal{E}_\Omega} dt.$$

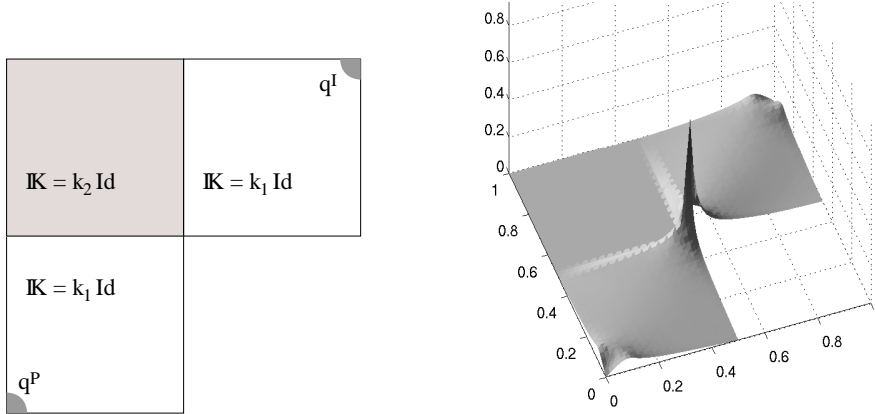


FIGURE 1. *Example 1*: Left: computational domain; right: absolute value  $|u_h|$  of the Darcy velocity at  $t = 1.0$  before any interaction between the concentration front and the corner singularity.

As in [1] it follows that  $B_d(c_i, v_i; \check{u}_i)$  coincides in the limit with  $(\nabla c, \mathbb{D}(u)\nabla v)$ . One can also conclude by adapting [1] that

$$\int_{t_1}^T (u \cdot \nabla c, v) + (q^I c, v) dt = \lim_{i \rightarrow \infty} \int_{t_1}^T B_{cq}(c_i, v_i; \check{u}_i) dt.$$

One arrives at

$$\begin{aligned} & \int_{t_1}^T -(\phi c, \partial_t v) + (\mathbb{D}(u)\nabla c, \nabla v) + (u \cdot \nabla c, v) + (q^I c, v) - (\hat{c}q^I, v) dt \\ &= \lim_{i \rightarrow \infty} \int_{t_1}^T (\phi d_t c_h^j, w_h) + B(\bar{c}_h^j, w_h; \check{u}_h^j) - (\bar{c}_h^j \bar{q}^{Ij}, w_h) dt = 0. \end{aligned}$$

Hence (W2) is satisfied for  $v \in \mathcal{D}(0, T; \mathcal{C}^\infty(\Omega))$ . The extension to  $\mathcal{D}(0, T; H^2(\Omega))$  follows from boundedness and density of smooth functions.  $\square$

#### 4. NUMERICAL EXPERIMENTS

The numerical experiments are carried out in two space dimensions with the lowest-order method on a mesh which consists of shape-regular triangles without hanging nodes and which is not changed over time. The diffusion–dispersion tensor takes the form

$$(6) \quad \mathbb{D}(u, x) = \phi(x) (d_m \text{Id} + |u| d_\ell E(u) + |u| d_t (\text{Id} - E(u))).$$

**Numerical Example 1** (Singular Velocities). To examine the effect of a singular velocity field caused by a discontinuous permeability distribution and a re-entrant corner we employ the L-shaped domain  $\Omega$  and  $\mathbb{K}$  with  $k_1 = 0.1$  and  $k_2 = 10^{-6}$  as depicted in Figure 1. The injection and production wells are located at  $(1, 1)$  and  $(0, 0)$ , respectively. The porous medium is almost impenetrable in the upper left quarter, forcing a high fluid velocity at the reentrant corner where the nearly impenetrable barrier is thinnest. This leads to a singularity  $|u| \sim r^{-\alpha}$ , where  $r$  is the

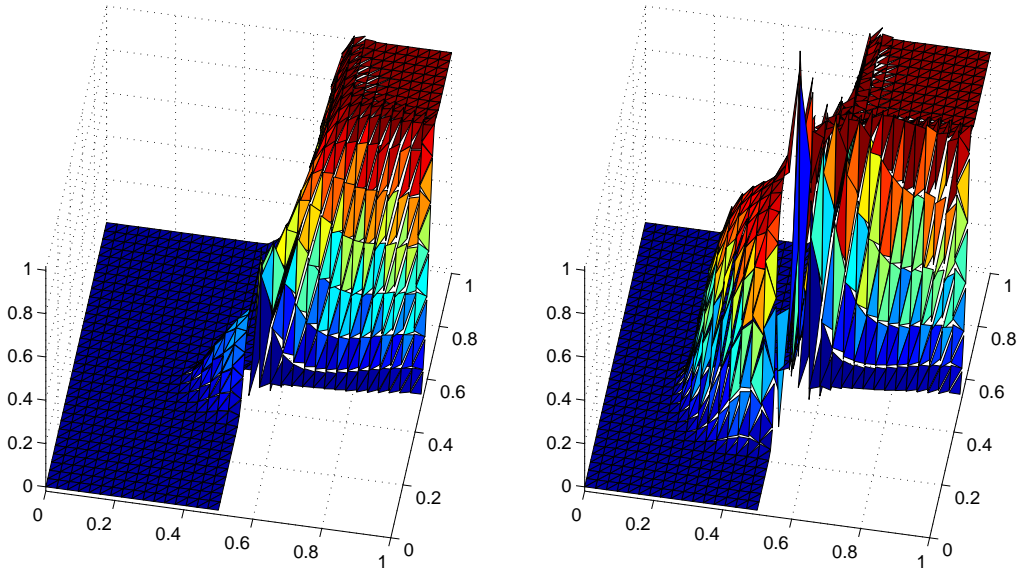


FIGURE 2. Snapshots of  $c_h$  at  $t = 1.5$  and  $2.0$ , computed with the Crank-Nicolson scheme.

distance to the reentrant corner and  $\alpha \approx 1$ , cf. [1]. Figure 2 shows the concentration when the front passes the corner and at a later time. The solution  $c_h$  contains step fronts but shows only the localised oscillations that are characteristic for dG methods.

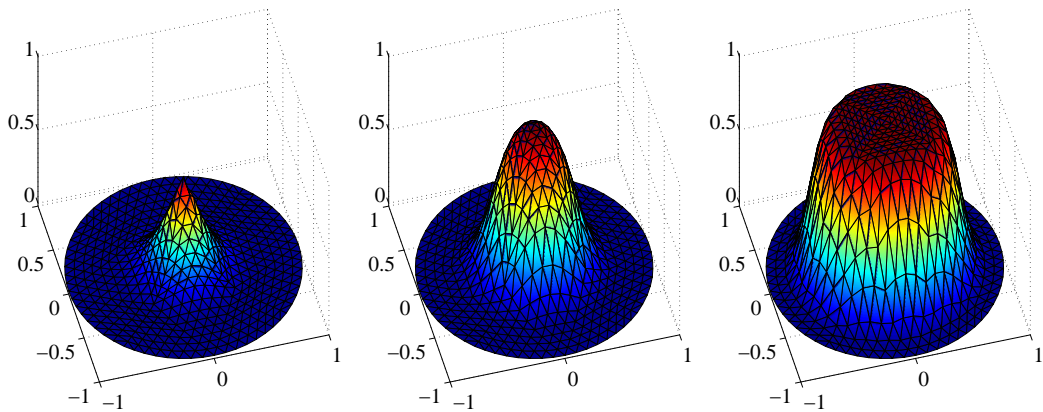


FIGURE 3. *Example 2*: Snapshots of the concentration  $c_{\text{ref}}$  at  $t = 0.25, 1.0$  and  $3.0$ .

**Numerical Example 2** (Convergence rates). Convergence rates are determined by comparing the numerical solution  $c_h$  to a reference solution  $c_{\text{ref}}$  that is computed with high accuracy on a one dimensional grid. More precisely, we set  $\phi = 1$ ,  $\hat{c} = 1$ ,  $\mathbb{K} = 1$  and  $g = 0$  and choose  $\Omega$  to be the ball  $B(0, 1) \subset \mathbb{R}^2$ . Using polar coordinates  $(r, \varphi)$ , we choose  $q^I = 4(1 - r)^6$  and  $q^P = \frac{4}{7}r^6$ . Then the Darcy velocity only changes in the radial direction and is determined by an ODE, which has the nonnegative



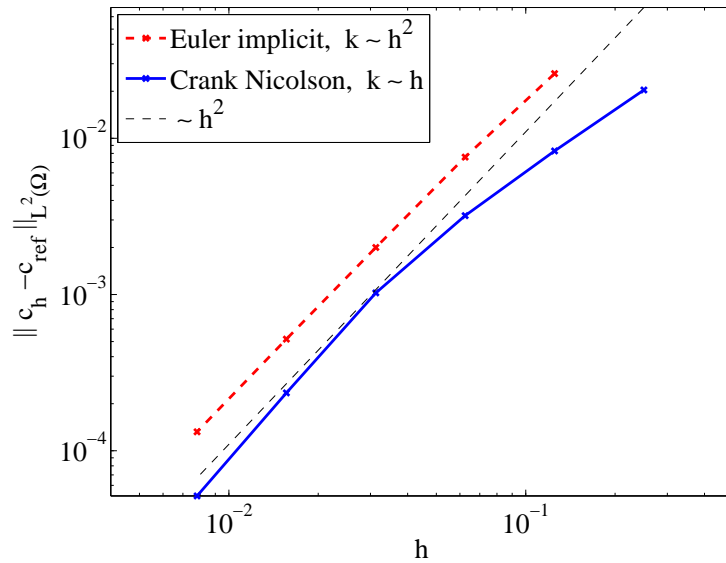


FIGURE 4. Error  $\|c_h - c_{\text{ref}}\|_{L^2(\Omega)}$  of the implicit Euler method the Crank-Nicolson method at time  $t = 1$ .

exact solution  $u(r) = \frac{r}{7} (3r^6 - 24r^5 + 70r^4 - 112r^3 + 105r^2 - 56r + 14)$ . Consequently, the concentration equation reduces to a linear parabolic equation in one space dimension. Figure 3 shows snapshots of the solution  $c_{\text{ref}}$  with  $d_m = 1.0 \times 10^{-5}$ ,  $d_\ell = 4.0 \times 10^{-4}$  and Figure 4 shows that  $L^2$  error of implicit Euler method is of order  $O(h^2 + k)$  whereas the Crank-Nicolson reaches the order  $O(h^2 + k^2)$ .

#### REFERENCES

- [1] S. BARTELS, M. JENSEN, R. MÜLLER, *Discontinuous Galerkin finite element convergence for incompressible miscible displacement problems of low regularity*, to appear in SIAM Journal on Numerical Analysis, submitted December 2007 (also preprint HU-Berlin 2008 No. 2, [www.mathematik.hu-berlin.de/publ/pre/2008/P-08-02.pdf](http://www.mathematik.hu-berlin.de/publ/pre/2008/P-08-02.pdf)).
- [2] Z. CHEN, *Reservoir simulation (Mathematical techniques in oil recovery)*, SIAM, 2007.
- [3] X. FENG, *Recent developments on modeling and analysis of flow of miscible fluids in porous media*, Fluid flow and transport in porous media, Contemp. Math. 295:229–24, 2002.
- [4] B. RIVIÈRE, N. WALKINGTON, *Convergence of a Discontinuous Galerkin Method for the Miscible Displacement Equations Under Minimal Regularity*, preprint May 2009, (<http://www.math.cmu.edu/~noelw/Noelw/Papers/RiWa09.pdf>).
- [5] V. THOMÉE, *Galerkin finite element methods for parabolic problems*, Springer Series in Computational Mathematics 25, 1997.