

# Weierstraß-Institut für Angewandte Analysis und Stochastik

im Forschungsverbund Berlin e.V.

Preprint

ISSN 0946 – 8633

## Stochastic analysis of an elastic 3D half-space respond to random boundary displacements: exact results and Karhunen-Loève expansion

I. A. Shalimova<sup>1</sup> and K.K. Sabelfeld<sup>1,2</sup>

<sup>1</sup> Institute of Computational Mathematics  
and Mathematical Geophysics, Russian Acad. Sci.  
Lavrentieva str., 6, 630090 Novosibirsk, Russia  
E-mail: ias@osmf.sccc.ru

<sup>2</sup>Weierstrass Institute for Applied Analysis and Stochastics  
Mohrenstr. 39, 10117 Berlin, Germany  
E-Mail: sabelfel@wias-berlin.de

No. 1387  
Berlin 2008



---

2000 *Mathematics Subject Classification.* 65C05, 65C20, 76S05,  
PACS: 02.60.Cb, 02.70.Lq .

*Key words and phrases.* Boundary white noise, Karhunen-Loève expansion, Poisson integral formula, boundary random excitations, 3D Lamé equation .

This work is supported partly by the RFBR Grant N 06-01-00498. I. Shalimova acknowledges the host institute WIAS, Berlin, and the support of DFG, under Grant SA 861/6-1 of 2008.

Edited by  
Weierstraß-Institut für Angewandte Analysis und Stochastik (WIAS)  
Mohrenstraße 39  
10117 Berlin  
Germany

Fax: + 49 30 2044975  
E-Mail: [preprint@wias-berlin.de](mailto:preprint@wias-berlin.de)  
World Wide Web: <http://www.wias-berlin.de/>

## Abstract

A stochastic response of an elastic 3D half-space to random displacement excitations on the boundary plane is studied. We derive exact results for the case of white noise excitations which are then used to give convolution representations for the case of general finite correlation length fluctuations of displacements prescribed on the boundary. Solutions to this elasticity problem are random fields which appear to be horizontally homogeneous but inhomogeneous in the vertical direction. This enables us to construct explicitly the Karhunen-Loève (K-L) series expansion by solving the eigen-value problem for the correlation operator. Simulation results are presented and compared with the exact representations derived for the displacement correlation tensor. This paper is a complete 3D generalization of the 2D case study we presented in *J. Stat. Physics*, v.132 (2008), N6, 1071-1095.

## 1 Introduction.

Stochastic partial differential equations are known to be a very effective tool in modeling complicated phenomena in all fields of science and technology. Examples include wave propagation in random media [8], transport through highly heterogeneous porous media [4],[5], [7], randomly forced Navier-Stokes equation [3], etc. Many interesting examples can be found in material science [14], [2], [23], chemistry and biology [24], [1], as well as in cosmology (e.g., see [20]). Note that the input random fields can be considered both as a natural source of stochastic fluctuations, or as a model to describe extremely complicated irregularities and uncertainties (e.g., see [26], [22], [15]).

In electrical impedance tomography [10], an important problem is to evaluate a global response to random boundary excitations, and to estimate local fluctuations of the solution fields. Similar analysis is made in the inverse problems of elastography [13], [18], acoustic scattering from rough surfaces [28], and reaction-diffusion equations with white noise boundary perturbations [22]. An interesting application of the model we study in this paper is the analysis of the dislocations in crystals by X-ray diffraction [9]. The physical measurement method is based on the X-ray scattering from relaxed heteroepitaxial layers with the misfit dislocations randomly distributed at the interface between the layer and the substrate.

It should be noted that the cases where the fluctuations are governed by random coefficients of PDS, or their source terms, are widely used and intensively analyzed, while the random boundary conditions are not so well studied. The main reason is that in this case, we deal with *statistically inhomogeneous* random fields, hence the well known and commonly used spectral methods are here not applicable anymore. Another difficulty comes from the necessity to deal with boundary conditions and treat the relevant random boundary functions.

The main method for modeling inhomogeneous random fields is the Karhunen-Loève (K-L) expansion. Generally, it is computational demanding because it requires to solve numerically

eigen-value problems of high dimension. However in some practically interesting cases models with analytically solvable eigen-value problem for the correlation operator can be obtained. This gives then a very efficient numerical method because as a rule, the K-L expansions are very fast convergent. We mention also the polynomial chaos expansion approach, a method in which it is attempted to reduce the original stochastic boundary value problem to a series of deterministic equations (e.g., see [27], [25]). This method however is applicable only if a small number of the series expansion is sufficient for a good approximation which is rather rare in practice.

In many interesting cases the solution of a PDE is a partially homogeneous random field generated by the homogeneous random excitations on the boundary. We analyzed the cases of Laplace, biharmonic, and Lamé equations in [17], the Stokes equation in [19], and the fractional Laplace equation in [20]. In [21] we have given exact representations for the correlation tensor, and the K-L expansions of the displacements in the case of the elastic half-plane. In this paper we extend these results to the half-space  $D^+ = R_+^3$ .

## 2 The system of Lamé equations governing an elastic half-space.

Let us consider the Dirichlet problem for the system of Lamé equations in the domain  $D^+ \subset R^3$ , the upper half-space with the boundary  $\Gamma = \{z : z = 0\}$ :

$$\Delta \mathbf{u}(\mathbf{x}) + \alpha \operatorname{grad} \operatorname{div} \mathbf{u}(\mathbf{x}) = 0, \quad \mathbf{x} \in D^+, \quad \mathbf{u}(\mathbf{x}') = \mathbf{g}(\mathbf{x}') \quad \mathbf{x}' \in \Gamma = \partial D^+, \quad (1)$$

where  $\mathbf{u}(\mathbf{x}) = (u_1(x, y, z), \dots, u_3(x, y, z))^T$  is a column vector of displacements, and  $\mathbf{g}(\mathbf{x}') = (g_1(x', y'), \dots, g_3(x', y'))^T$  is the vector of displacements prescribed on the boundary. The elastic constant  $\alpha = (\lambda + \mu)/\mu$  is expressed through the Lamé constants of elasticity  $\lambda$  and  $\mu$ . We assume throughout the paper that these equations are properly written in a dimensionless form, so we deal with dimensionless displacements  $\mathbf{u}$  as functions of dimensionless variable  $\mathbf{x}$ .

### 2.1 Poisson formula for the upper half-plane

The Poisson formula for the problem (1) has the form (see [12])

$$\mathbf{u}(x, y, z) = \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} K(x - x', y - y', z) \mathbf{g}(x', y') dx' dy', \quad (2)$$

where the matrix kernel  $K$  is given explicitly by

$$K(x - x', y - y', z) = \frac{z}{2\pi r^3} \left\{ (1 - \beta) \mathbf{I} + \frac{3\beta}{r^2} \begin{pmatrix} (x - x')^2 & (x - x')(y - y') & (x - x')z \\ (x - x')(y - y') & (y - y')^2 & (y - y')z \\ (x - x')z & (y - y')z & z^2 \end{pmatrix} \right\}, \quad (3)$$

where  $\mathbf{I}$  is the identity matrix,  $\beta = \frac{\lambda + \mu}{\lambda + 3\mu}$ , and

$$r = \sqrt{(x - x')^2 + (y - y')^2 + z^2}.$$

### 3 Stochastic boundary value problem.

#### 3.1 Correlation tensor.

Assume the boundary displacements  $g_i$ ,  $i = 1, 2, 3$  are homogeneous Gaussian random fields with zero mean,  $\langle \mathbf{g} \rangle = 0$ , then  $\mathbf{u}(x, y, z)$  is also a Gaussian random field with  $\langle \mathbf{u} \rangle = 0$ . Hence this random field is uniquely defined by its correlation tensor. Note that there is no loss of generality since, generally,  $\langle \mathbf{u} \rangle = \langle \mathbf{g} \rangle$  for homogeneous random field  $\mathbf{g}$ . This can be readily obtained by averaging of (2) and taking into account that the expectation of a homogeneous random field is a constant.

By the formula (2) for  $\mathbf{u}$ , the correlation tensor  $B_u(\mathbf{x}_1; \mathbf{x}_2) = B_u(x_1, y_1, z_1; x_2, y_2, z_2)$  for the displacements can be written as follows

$$\begin{aligned} B_u(\mathbf{x}_1; \mathbf{x}_2) &= \langle \mathbf{u}(x_1, y_1, z_1) \otimes \mathbf{u}(x_2, y_2, z_2) \rangle \\ &= \int_{R^4} K(x_1 - x'_1, y_1 - y'_1, z_1) B_g(\mathbf{x}'_1; \mathbf{x}'_2) K^T(x_2 - x'_2, y_2 - y'_2, z_2) dx'_1 dy'_1 dz_1 dz_2. \end{aligned} \quad (4)$$

We use here the notation  $\otimes$  for the direct product of vectors  $\mathbf{u}(x_1, y_1, z_1)$  and  $\mathbf{u}(x_2, y_2, z_2)$ , and  $B_g(\mathbf{x}'_1; \mathbf{x}'_2)$  for the correlation tensor of the random boundary vector field  $\mathbf{g}$

$$B_g(\mathbf{x}'_1; \mathbf{x}'_2) = B_g(x'_1, y'_1; x'_2, y'_2) = \langle \mathbf{g}(x'_1, y'_1) \otimes \mathbf{g}(x'_2, y'_2) \rangle.$$

Let us consider the case when  $\mathbf{g}$  is a 2D white noise defined on the plane  $z = 0$ . This implies that

$$\{B_g(\mathbf{x}'_1; \mathbf{x}'_2)\}_{ij} = \delta_{ij} \delta(x'_1 - x'_2) \delta(y'_1 - y'_2), \quad i, j = 1, 2, 3.$$

Here we use standard notations,  $\delta_{ij}$  for the Kronecker symbol, and  $\delta(\cdot)$  for the Dirac  $\delta$ -function.

**Theorem 1.** *The solution of the boundary value problem (1) with the prescribed Gaussian white noise displacements on the boundary is a Gaussian random field, horizontally homogeneous, and hence is uniquely defined by its correlation tensor which depends on the difference of the horizontal coordinates  $x_1 - x_2$  and  $y_1 - y_2$ , while in the vertical direction, it depends on the product  $z_1 z_2$ , and  $z_1 \pm z_2$ , and has the following explicit form:*

$$\begin{aligned} B_u &= \frac{z_1 + z_2}{2\pi \hat{r}^3} \left\{ (1 - \beta)I + \frac{3\beta}{\hat{r}^2} \begin{pmatrix} \tau_x^2 & \tau_x \tau_y & \tau_x(z_1 - z_2) \\ \tau_x \tau_y & \tau_y^2 & \tau_y(z_1 - z_2) \\ \tau_x(z_1 - z_2) & \tau_y(z_1 - z_2) & (z_1 + z_2)^2 \end{pmatrix} \right. \\ &\quad \left. + \frac{6\beta^2 z_1 z_2}{\hat{r}^4} \begin{pmatrix} \hat{r}^2 - 5\tau_x^2 & -5\tau_x \tau_y & \tau_x(5(z_1 + z_2) - \frac{\hat{r}^2}{z_1 + z_2}) \\ -5\tau_x \tau_y & \hat{r}^2 - 5\tau_y^2 & \tau_y(5(z_1 + z_2) - \frac{\hat{r}^2}{z_1 + z_2}) \\ \tau_x(\frac{\hat{r}^2}{z_1 + z_2} - 5(z_1 + z_2)) & \tau_y(\frac{\hat{r}^2}{z_1 + z_2} - 5(z_1 + z_2)) & 2\hat{r}^2 - 5(\tau_x^2 + \tau_y^2) \end{pmatrix} \right\}, \end{aligned} \quad (5)$$

where

$$\hat{r} = \sqrt{\tau_x^2 + \tau_y^2 + (z_1 + z_2)^2}, \quad \tau_x = x_1 - x_2, \quad \tau_y = y_1 - y_2.$$

**Proof.** For the white noise the formula (4) takes the form

$$B_u(\mathbf{x}_1; \mathbf{x}_2) = \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} K(x_1 - x'_1, y_1 - y'_1, z_1) K^T(x_2 - x'_2, y_2 - y'_2, z_2) dx'_1 dy'_1.$$

To integrate the right-hand side we use the Fourier transformation. Let us take a change of variables,  $w_x = x'_1 - x_2$  and  $w_y = y'_1 - y_2$ , and then use new variables  $\tau_x = x_1 - x_2$ ,  $\tau_y = y_1 - y_2$ . This yields

$$B_u(\tau_x, \tau_y; z_1, z_2) = \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} K(\tau_x - w_x, \tau_y - w_y, z_1) K^T(-w_x, -w_y, z_2) dw_x dw_y .$$

The last formula has a convolution form and can be written shortly as

$$B_u(\tau_x, \tau_y; z_1, z_2) = K(\tau_x, \tau_y, z_1) * K(-w_x, -w_y, z_2) .$$

The Fourier transform property for convolutions yields

$$F^{-1}[B_u] = F^{-1}[K(\tau_x, \tau_y, z_1)] F^{-1}[K(-w_x, -w_y, z_2)] .$$

So we have to find the inverse transform  $F^{-1}[K](\tau_x, \tau_y, z)$ . Using the Fourier transform formulae (31)-(35) presented in the Appendix A, we find that  $F^{-1}[K](\tau_x, \tau_y, z) = e^{-z\sqrt{\xi_x^2 + \xi_y^2}} G(\xi_x, \xi_y, z)$ , and

$$F^{-1}[B_u] = e^{-(z_1+z_2)\sqrt{\xi_x^2 + \xi_y^2}} G(\xi_x, \xi_y, z_1) G^*(\xi_x, \xi_y, z_2) , \quad (6)$$

where the star sign stands for the complex conjugate transpose, and

$$G(\xi_x, \xi_y, z) = \mathbf{I} - \beta z \begin{pmatrix} \frac{\xi_x^2}{\sqrt{\xi_x^2 + \xi_y^2}} & \frac{\xi_x \xi_y}{\sqrt{\xi_x^2 + \xi_y^2}} & \imath \xi_x \\ \frac{\xi_x \xi_y}{\sqrt{\xi_x^2 + \xi_y^2}} & \frac{\xi_y^2}{\sqrt{\xi_x^2 + \xi_y^2}} & \imath \xi_y \\ \imath \xi_x & \imath \xi_y & -\sqrt{\xi_x^2 + \xi_y^2} \end{pmatrix} . \quad (7)$$

Note that we have taken the inverse Fourier transform of the correlation tensor with respect to the variables  $x, y$ . It means that we get a partial spectral tensor  $S_u$ . Indeed, by definition

$$S_u(\xi_x, \xi_y, z_1, z_2) = F^{-1}[B_u(\tau_x, \tau_y, z_1, z_2)] = \frac{1}{2\pi} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} e^{-i(\xi_x \tau_x + \xi_y \tau_y)} B_u(\tau_x, \tau_y, z_1, z_2) d\tau_x d\tau_y ,$$

hence

$$S_u(\xi_x, \xi_y, z_1, z_2) = e^{-\sqrt{\xi_x^2 + \xi_y^2}(z_1+z_2)} G(\xi_x, \xi_y, z_1) G^*(\xi_x, \xi_y, z_2) . \quad (8)$$

We will find now the correlation tensor  $B_u$  by using the relevant Fourier transform properties. To this end we rewrite (6) as follows:

$$\begin{aligned} F^{-1}[B_u] &= e^{-(z_1+z_2)\sqrt{\xi_x^2 + \xi_y^2}} G(\xi_x, \xi_y, z_1) G^*(\xi_x, \xi_y, z_2) \\ &= e^{-(z_1+z_2)\sqrt{\xi_x^2 + \xi_y^2}} \left\{ \mathbf{I} - \beta(z_1 + z_2) \begin{pmatrix} \frac{\xi_x^2}{\sqrt{\xi_x^2 + \xi_y^2}} & \frac{\xi_x \xi_y}{\sqrt{\xi_x^2 + \xi_y^2}} & \imath \frac{\xi_x(z_1 - z_2)}{z_1 + z_2} \\ \frac{\xi_x \xi_y}{\sqrt{\xi_x^2 + \xi_y^2}} & \frac{\xi_y^2}{\sqrt{\xi_x^2 + \xi_y^2}} & \imath \frac{\xi_y(z_1 - z_2)}{z_1 + z_2} \\ \imath \frac{\xi_x(z_1 - z_2)}{z_1 + z_2} & \imath \frac{\xi_y(z_1 - z_2)}{z_1 + z_2} & -\sqrt{\xi_x^2 + \xi_y^2} \end{pmatrix} \right. \\ &\quad \left. + 2\beta^2 z_1 z_2 \begin{pmatrix} \xi_x^2 & \xi_x \xi_y & -\imath \xi_x \sqrt{\xi_x^2 + \xi_y^2} \\ \xi_x \xi_y & \xi_y^2 & -\imath \xi_y \sqrt{\xi_x^2 + \xi_y^2} \\ \imath \xi_x \sqrt{\xi_x^2 + \xi_y^2} & \imath \xi_y \sqrt{\xi_x^2 + \xi_y^2} & \xi_x^2 + \xi_y^2 \end{pmatrix} \right\} . \quad (9) \end{aligned}$$

To obtain the desired representation for the tensor  $B_u$ , we convert (9) by using the formulae (36)-(39) derived in Appendix A.

### 3.2 Spectral representations for partially homogeneous random fields.

So as follows from the Theorem 1, the solution random field  $\mathbf{u}(x, y, z)$  is homogeneous with respect to the variables  $x, y$ , it means that

$$B_u = \langle \mathbf{u}(x_1, y_1, z_1) \otimes \mathbf{u}(x_2, y_2, z_1) \rangle = B_u(x_1 - x_2, y_1 - y_2, z_1, z_2) .$$

As mentioned above, the random fields with this property are called partially homogeneous, with the partial spectral tensor  $S_u(\xi_x, \xi_y, z_1, z_2)$  given by (8).

To simulate partially homogeneous random fields  $\mathbf{u}(\mathbf{x})$ , the randomization spectral model described in [21] can be used. This model first presented in [16] has the form

$$\hat{\mathbf{u}}(x, y, z) = \frac{1}{[p(\xi_x, \xi_y)]^{1/2}} \left[ \zeta_\xi(z) \cos(\xi_x x + \xi_y y) + \boldsymbol{\eta}_\xi(z) \sin(\xi_x x + \xi_y y) \right], \quad (10)$$

where the random variables  $\xi_x, \xi_y$  have a distribution density  $p(\xi_x, \xi_y)$  in the wave space (which can be chosen quite arbitrarily), and the real-valued 6-dimensional field  $(\zeta_\xi(z), \boldsymbol{\eta}_\xi(z))^T$  for fixed  $\xi_x, \xi_y$  has the correlation tensor

$$B_{(\zeta, \boldsymbol{\eta})}(z_1, z_2) = \begin{pmatrix} \langle \zeta_\xi(z_1) \otimes \zeta_\xi(z_2) \rangle & \langle \zeta_\xi(z_1) \otimes \boldsymbol{\eta}_\xi(z_2) \rangle \\ \langle \boldsymbol{\eta}_\xi(z_1) \otimes \zeta_\xi(z_2) \rangle & \langle \boldsymbol{\eta}_\xi(z_1) \otimes \boldsymbol{\eta}_\xi(z_2) \rangle \end{pmatrix} = \begin{pmatrix} \Re S_u(\cdot, z_1, z_2) & \Im S_u(\cdot, z_1, z_2) \\ -\Im S_u(\cdot, z_1, z_2) & \Re S_u(\cdot, z_1, z_2) \end{pmatrix} . \quad (11)$$

Here we use the notation  $\Re S_u$  and  $\Im S_u$  for the real and imaginary part of  $S_u$ , respectively. Using the decomposition of  $S_u$  in the product (8) it is easy to verify that

$$\begin{pmatrix} \Re S_u & \Im S_u \\ -\Im S_u & \Re S_u \end{pmatrix} = e^{-\sqrt{\xi_x^2 + \xi_y^2}(z_1 + z_2)} \begin{pmatrix} \Re G & \Im G \\ -\Im G & \Re G \end{pmatrix}_{(\cdot, z_1)} \begin{pmatrix} \Re G & \Im G \\ -\Im G & \Re G \end{pmatrix}_{(\cdot, z_2)}^T .$$

Then the 6-dimensional vector field  $(\zeta_\xi(z), \boldsymbol{\eta}_\xi(z))^T$  defined by

$$\begin{pmatrix} \zeta_\xi \\ \boldsymbol{\eta}_\xi \end{pmatrix} = e^{-z\sqrt{\xi_x^2 + \xi_y^2}} \begin{pmatrix} \Re G & \Im G \\ -\Im G & \Re G \end{pmatrix} \begin{pmatrix} \boldsymbol{\zeta} \\ \boldsymbol{\eta} \end{pmatrix} , \quad (12)$$

has the desired correlation tensor (11). Here  $\boldsymbol{\zeta}$  and  $\boldsymbol{\eta}$  are independent 3-dimensional Gaussian random vectors with zero mean and unit covariance matrix.

Thus we have a Randomization spectral model of type (10) where the random vectors  $\zeta_\xi$  and  $\boldsymbol{\eta}_\xi$  are constructed by (12), and  $\xi_x, \xi_y$  are sampled according to an arbitrary density  $p$  in the wave space.

This model has the desired correlation tensor, i.e.,  $B_{\hat{\mathbf{u}}} = B_u$ ,

$$\begin{aligned} B_u(\tau_x, \tau_y, z_1, z_2) &= \frac{1}{2\pi} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} e^{i(\xi_x \tau_x + \xi_y \tau_y)} S_u(\xi_x, \xi_y, z_1, z_2) d\xi_x d\xi_y \\ &= \frac{1}{2\pi} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \left[ \Re S_u \cos(\xi_x \tau_x + \xi_y \tau_y) - \Im S_u \sin(\xi_x \tau_x + \xi_y \tau_y) \right] d\xi_x d\xi_y , \end{aligned} \quad (13)$$

here  $\tau_x = x_1 - x_2$ ,  $\tau_y = y_1 - y_2$  (see [21]).

Concerning the sampling of the wave vectors, one of the simplest choice is a uniform distribution. Then however we have to cut-off the range where the wave numbers  $\xi_x$  and  $\xi_y$  are defined, say from  $-R_1$  to  $R_1$  and  $-R_2$  to  $R_2$ ,  $R_i$  being large enough. In addition, to ensure that all the high-dimensional distributions of the model are close to Gaussian, one usually takes a sum of independent realizations of modes (10). In another version, one makes a partition of the wave number space into bins, and takes a sum of samples with wave number modes sampled independently within each bin (e.g., see [11], [16]).

This is generally different from a deterministic approximation of the stochastic integral representation of the random field with the correlation tensor (13) where the integration is taken from  $-R_1$  to  $R_1$  and  $-R_2$  to  $R_2$ . This leads to an approximation in the form

$$\begin{aligned} \mathbf{u}(x, y, z) \approx \hat{\mathbf{u}}(x, y, z) &= \frac{1}{2\sqrt{R_1 R_2}} \sum_{\substack{k, m = -\infty \\ (k, m) \neq (0, 0)}}^{\infty} e^{-\pi z \sqrt{(k/R_1)^2 + (m/R_2)^2}} \times \\ &\left[ (\Re G(k, m, z) \boldsymbol{\zeta}_{k, m} + \Im G(k, m, z) \boldsymbol{\eta}_{k, m}) \cos \pi \left( \frac{k x}{R_1} + \frac{m y}{R_2} \right) \right. \\ &\quad \left. + (\Re G(k, m, z) \boldsymbol{\eta}_{k, m} - \Im G(k, m, z) \boldsymbol{\zeta}_{k, m}) \sin \pi \left( \frac{k x}{R_1} + \frac{m y}{R_2} \right) \right] \end{aligned}$$

where  $\boldsymbol{\eta}_{k, m}$ ,  $\boldsymbol{\zeta}_{k, m}$  are families of independent standard Gaussian vectors, and  $G(k, m, z)$  is the matrix  $G$  defined in (7) with the values  $\xi_k = \pi k/R_1$ ,  $\xi_m = \pi m/R_2$ :

$$G(k, m, z) = \mathbf{I} - \beta z \pi \begin{pmatrix} \frac{k^2}{R_1^2 \sqrt{(k/R_1)^2 + (m/R_2)^2}} & \frac{k m}{R_1 R_2 \sqrt{(k/R_1)^2 + (m/R_2)^2}} & \imath \frac{k}{R_1} \\ \frac{k m}{R_1 R_2 \sqrt{(k/R_1)^2 + (m/R_2)^2}} & \frac{m^2}{R_2^2 \sqrt{(k/R_1)^2 + (m/R_2)^2}} & \imath \frac{m}{R_2} \\ \imath \frac{k}{R_1} & \imath \frac{m}{R_2} & -\sqrt{\left(\frac{k}{R_1}\right)^2 + \left(\frac{m}{R_2}\right)^2} \end{pmatrix}. \quad (14)$$

This model has a correlation tensor which is an approximation to the original correlation tensor  $B_u$ :

$$\begin{aligned} B_u(\tau_x, \tau_y, z_1, z_2) &\approx \frac{1}{4R_1 R_2} \sum_{\substack{k, m = -\infty \\ (k, m) \neq (0, 0)}}^{\infty} e^{-\pi(z_1 + z_2) \sqrt{(k/R_1)^2 + (m/R_2)^2}} \times \\ &\left[ \Re \{G(k, m, z) G^*(k, m, z)\} \cos \pi \left( \frac{k \tau_x}{R_1} + \frac{m \tau_y}{R_2} \right) - \right. \\ &\quad \left. \Im \{G(k, m, z) G^*(k, m, z)\} \sin \pi \left( \frac{k \tau_x}{R_1} + \frac{m \tau_y}{R_2} \right) \right]. \end{aligned}$$

All these arguments are basically rigorous and use essentially the important properties that (1) the solution random field is partially homogeneous, and (2) the partial spectral tensor  $S_u(\cdot, z_1, z_2)$  can be represented as a product of two matrices,  $G(\cdot, z_1)$  and  $G^*(\cdot, z_2)$ .

In the next section we treat the solution as a general inhomogeneous random field, and rigorously derive the Karhunen-Loève expansion for the random field itself, and for its correlation tensor.

### 3.3 The Karhunen-Loève expansion.

The Karhunen-Loève expansion has the form (e.g., see [29], [17], [21] ):

$$\mathbf{u}(\mathbf{x}) = \sum_{k=1}^{\infty} \sqrt{\lambda_k} \eta_k \mathbf{h}_k(\mathbf{x}) ,$$

where  $\eta_k$  is a family of independent random variables,  $\lambda_k$  and  $\mathbf{h}_k(\mathbf{x})$  are the eigen-values and eigen-functions of the covariance operator  $B_u$ , i.e.,

$$\int B_u(\mathbf{x}_1, \mathbf{x}_2) \mathbf{h}_k(\mathbf{x}_2) d\mathbf{x}_2 = \lambda_k \mathbf{h}_k(\mathbf{x}_1) .$$

In our case  $\mathbf{u}$  is partially homogeneous, that means, it is homogeneous with respect to the variables  $x, y$ , and is inhomogeneous with respect to  $z$ . It implies, that the eigen-value problem reads

$$\int_0^{\infty} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} B_u(x_1 - x_2, y_1 - y_2, z_1, z_2) \mathbf{h}_k(x_2, y_2, z_2) dx_2 dy_2 dz_2 = \lambda_k \mathbf{h}_k(x_1, y_1, z_1) . \quad (15)$$

For the correlation tensor the Karhunen-Loève expansion looks like

$$B_u(x_1 - x_2, y_1 - y_2, z_1, z_2) = \sum_{k=1}^{\infty} \lambda_k (\mathbf{h}_k(x_1, y_1, z_1) \otimes \mathbf{h}_k(x_2, y_2, z_2)) .$$

For our domain  $D^+$  we apply a cut-off integration for (15) from  $-R_1$  to  $R_1$  over the variable  $x$  and from  $-R_2$  to  $R_2$  over  $y$ , i.e., we solve the eigen-value problem

$$\int_0^{\infty} \int_{-R_1}^{R_1} \int_{-R_2}^{R_2} B_u(x_2 - x_1, y_1 - y_2, z_1, z_2) \mathbf{h}_k(x_2, y_2, z_2) dx_2 dy_2 dz_2 = \lambda_k \mathbf{h}_k(x_1, y_1, z_1) \quad (16)$$

where  $R_i$  are sufficiently large. In what follows and throughout the paper we preserve for simplicity the notation  $\mathbf{u} = (u_1, u_2, u_3)^T$  and  $B_u$  for the problem with the introduced cut-off, that means the problem (1) is considered in the region  $\{(x, y, z) : -R_1 \leq x \leq R_1, -R_2 \leq y \leq R_2, z > 0\}$ .

**Theorem 2.** *The solution random field  $\mathbf{u}(x, y, z)$  has the following Karhunen-Loève expansion*

$$\begin{pmatrix} u_1(x, y, z) \\ u_2(x, y, z) \\ u_3(x, y, z) \end{pmatrix} = \sum_{\substack{k, m = -\infty \\ (k, m) \neq (0, 0)}}^{\infty} \sum_{i=1}^3 \frac{e^{-\pi z \sqrt{(k/R_1)^2 + (m/R_2)^2}}}{2\sqrt{R_1 R_2}} \begin{pmatrix} a_i (\zeta_{k,m}^i \cos \gamma_{km} + \tilde{\zeta}_{k,m}^i \sin \gamma_{km}) \\ b_i (\zeta_{k,m}^i \cos \gamma_{km} + \tilde{\zeta}_{k,m}^i \sin \gamma_{km}) \\ c_i (\zeta_{k,m}^i \sin \gamma_{km} - \tilde{\zeta}_{k,m}^i \cos \gamma_{km}) \end{pmatrix} ,$$

where  $\zeta_{k,m}^i, \tilde{\zeta}_{k,m}^i$  are independent standard Gaussian random variables,  $\gamma_{km} = \pi \left( \frac{kx}{R_1} + \frac{my}{R_2} \right)$ , and the coefficients  $a_i, b_i, c_i$  are given explicitly by

$$\begin{aligned} a_1 &= 1 - \frac{\beta z \pi k^2}{R_1^2 \sqrt{(k/R_1)^2 + (m/R_2)^2}} , & b_1 &= -\frac{\beta z \pi k m}{R_1 R_2 \sqrt{(k/R_1)^2 + (m/R_2)^2}} , & c_1 &= \beta z \pi \frac{k}{R_1} , \\ a_2 &= -\frac{\beta z \pi k m}{R_1 R_2 \sqrt{(k/R_1)^2 + (m/R_2)^2}} , & b_2 &= 1 - \frac{\beta z \pi m^2}{R_2^2 \sqrt{(k/R_1)^2 + (m/R_2)^2}} , & c_2 &= \beta z \pi \frac{m}{R_2} , \\ a_3 &= \beta z \pi k/R_1 , & b_3 &= \beta z \pi m/R_2 , & c_3 &= -1 - \beta z \pi \sqrt{(k/R_1)^2 + (m/R_2)^2} . \end{aligned}$$

The correlation tensor is represented by the series

$$\begin{aligned}
B_u = & \sum_{\substack{k, m = -\infty \\ (k, m) \neq (0, 0)}}^{\infty} \frac{e^{-\pi(z_1+z_2)\sqrt{(k/R_1)^2+(m/R_2)^2}}}{4R_1R_2} \left\{ \left( I + 2\pi^2\beta^2 z_1z_2 \begin{pmatrix} \frac{k^2}{R_1^2} & \frac{km}{R_1R_2} & 0 \\ \frac{km}{R_1R_2} & \frac{m^2}{R_2^2} & 0 \\ 0 & 0 & \frac{k^2}{R_1^2} + \frac{m^2}{R_2^2} \end{pmatrix} \right. \right. \\
& - \frac{\pi\beta(z_1+z_2)}{\sqrt{(k/R_1)^2+(m/R_2)^2}} \begin{pmatrix} \frac{k^2}{R_1^2} & \frac{km}{R_1R_2} & 0 \\ \frac{km}{R_1R_2} & \frac{m^2}{R_2^2} & 0 \\ 0 & 0 & -\frac{k^2}{R_1^2} + \frac{m^2}{R_2^2} \end{pmatrix} \left. \right) \cos \hat{\gamma}_{km} \\
& + \left( \beta\pi(z_1-z_2) \begin{pmatrix} 0 & 0 & \frac{k}{R_1} \\ 0 & 0 & \frac{m}{R_2} \\ \frac{k}{R_1} & \frac{m}{R_2} & 0 \end{pmatrix} + 2\beta^2 z_1z_2\pi^2 \sqrt{\frac{k^2}{R_1^2} + \frac{m^2}{R_2^2}} \begin{pmatrix} 0 & 0 & \frac{k}{R_1} \\ 0 & 0 & \frac{m}{R_2} \\ \frac{-k}{R_1} & \frac{-m}{R_2} & 0 \end{pmatrix} \right) \sin \hat{\gamma}_{km} \left. \right\} \quad (17)
\end{aligned}$$

where  $\hat{\gamma}_{km} = \pi\left(\frac{k\tau_x}{R_1} + \frac{m\tau_y}{R_2}\right)$ .

**Proof.** The proof and the relevant series expansions will immediately follow from the solution of the eigen-value problem for the correlation tensor (16). To get the Karhunen-Loève expansions for  $\mathbf{u}$  we split it into three independent random fields:

$$\mathbf{u}(x, y, z) = \mathbf{V}_1(x, y, z) + \mathbf{V}_2(x, y, z) + \mathbf{V}_3(x, y, z). \quad (18)$$

Since  $\mathbf{V}_i$  and  $\mathbf{V}_j$  are independent ( $i \neq j$ ), the correlation tensor can be represented in the form

$$B_u = \langle \mathbf{u}(\mathbf{x}_1) \otimes \mathbf{u}(\mathbf{x}_2) \rangle = \langle \mathbf{V}_1(\mathbf{x}_1) \otimes \mathbf{V}_1(\mathbf{x}_2) \rangle + \langle \mathbf{V}_2(\mathbf{x}_1) \otimes \mathbf{V}_2(\mathbf{x}_2) \rangle + \langle \mathbf{V}_3(\mathbf{x}_1) \otimes \mathbf{V}_3(\mathbf{x}_2) \rangle, \quad (19)$$

or, shortly,  $B_u = B_{V_1} + B_{V_2} + B_{V_3}$ , where  $(\mathbf{x}_j) = (x_j, y_j, z_j)$  for  $j = 1, 2, 3$ . So we have to solve the eigen-value problems for the correlation tensors  $B_{V_i}$

$$\int_0^{\infty} \int_{-R_1}^{R_1} \int_{-R_2}^{R_2} B_{V_i}(x_2 - x_1, y_1 - y_2, z_1, z_2) h_{k,m}^i(x_2, y_2, z_2) dx_2 dy_2 dz_2 = \lambda_{k,m}^i h_{k,m}^i(x_1, y_1, z_1), \quad (20)$$

for  $i = 1, 2, 3$  and  $k, m = 0, \pm 1, \pm 2, \dots, (k, m) \neq (0, 0)$ .

In the following statement we solve these three eigen-value problems.

**Lemma.** *The eigen-value problems (20) have the following systems of eigen-values  $\lambda_{k,m}^i, \tilde{\lambda}_{k,m}^i$  and the corresponding eigen-functions,*

$$h_{k,m}^i(\mathbf{x}) = \frac{e^{-z\sqrt{\xi_k^2+\xi_m^2}}}{\Delta_i} \begin{pmatrix} a_i \cos(x\xi_k + y\xi_m) \\ b_i \cos(x\xi_k + y\xi_m) \\ c_i \sin(x\xi_k + y\xi_m) \end{pmatrix}, \quad \tilde{h}_{k,m}^i(\mathbf{x}) = \frac{e^{-z\sqrt{\xi_k^2+\xi_m^2}}}{\Delta_i} \begin{pmatrix} a_i \sin(x\xi_k + y\xi_m) \\ b_i \sin(x\xi_k + y\xi_m) \\ -c_i \cos(x\xi_k + y\xi_m) \end{pmatrix}$$

with

$$\begin{aligned}
a_1 &= 1 - \frac{z\beta\xi_k^2}{\sqrt{\xi_k^2 + \xi_m^2}}, & b_1 &= -\frac{z\beta\xi_k\xi_m}{\sqrt{\xi_k^2 + \xi_m^2}}, & c_1 &= z\beta\xi_k, \\
a_2 &= -\frac{z\beta\xi_k\xi_m}{\sqrt{\xi_k^2 + \xi_m^2}}, & b_2 &= 1 - \frac{z\beta\xi_m^2}{\sqrt{\xi_k^2 + \xi_m^2}}, & c_2 &= z\beta\xi_m,
\end{aligned}$$

$$a_3 = z\beta\xi_k, \quad b_3 = z\beta\xi_m, \quad c_3 = -1 - z\beta\sqrt{\xi_k^2 + \xi_m^2},$$

and

$$\Delta_1^2 = \frac{R_1 R_2}{\sqrt{\xi_k^2 + \xi_m^2}} \left[ 1 - \frac{(1-\beta)\beta\xi_k^2}{(\xi_k^2 + \xi_m^2)} \right],$$

$$\Delta_2^2 = \frac{R_1 R_2}{\sqrt{\xi_k^2 + \xi_m^2}} \left[ 1 - \frac{(1-\beta)\beta\xi_m^2}{(\xi_k^2 + \xi_m^2)} \right], \quad \Delta_3^2 = \frac{R_1 R_2 (1 + \beta + \beta^2)}{\sqrt{\xi_k^2 + \xi_m^2}}.$$

Here the subindexes  $i$  stand for the  $i$ -th series of eigen-functions.

**Proof.** The vectors  $h_{k,m}^i, h_{j,l}^i$  are pairwise orthogonal, i.e.,

$$\int_{-R_1}^{R_1} \int_{-R_2}^{R_2} (h_{k,m}^i(\mathbf{x}), h_{j,l}^i(\mathbf{x})) dy dx = \delta_{kj} \delta_{ml}$$

for all  $k, m, j, l = 0, \pm 1, \pm 2 \dots$ , but  $(k, m) \neq (0, 0)$ ,  $(j, l) \neq (0, 0)$  and  $i = 1, 2, 3$ , as well as  $\tilde{h}_{k,m}^i, \tilde{h}_{j,l}^i$ . Here  $\delta_{kl}$  is the Kronecker symbol. The vectors  $h_{k,m}^i$  and  $\tilde{h}_{k,m}^i$  are orthogonal, too. The normalization follows from

$$\begin{aligned} \|h_{k,m}^1\|^2 &= \frac{1}{\Delta_1^2} \int_0^\infty \int_{-R_1}^{R_1} \int_{-R_2}^{R_2} (h_{k,m}^1(\mathbf{x}), h_{k,m}^1(\mathbf{x})) d\mathbf{x} \\ &= \frac{1}{\Delta_1^2} \int_0^\infty \int_{-R_1}^{R_1} \int_{-R_2}^{R_2} e^{-2z\sqrt{\xi_k^2 + \xi_m^2}} \left[ (a_1^2 + b_1^2) \cos^2(x\xi_k + y\xi_m) + c_1^2 \sin^2(x\xi_k + y\xi_m) \right] d\mathbf{x} \\ &= \frac{2R_1 R_2}{\Delta_1^2} \int_0^\infty \left( 1 + 2\beta^2 \xi_k^2 z^2 - \frac{2\beta\xi_k^2 z}{\sqrt{\xi_k^2 + \xi_m^2}} \right) e^{-2z\sqrt{\xi_k^2 + \xi_m^2}} dz \\ &= \frac{2R_1 R_2}{2\sqrt{\xi_k^2 + \xi_m^2} \Delta_1^2} \left( 1 - \frac{(1-\beta)\beta\xi_k^2}{\xi_k^2 + \xi_m^2} \right) = 1, \end{aligned}$$

since

$$\int_{-R_1}^{R_1} \int_{-R_2}^{R_2} \cos^2(x\xi_k + y\xi_m) dx dy = \int_{-R_1}^{R_1} \int_{-R_2}^{R_2} \sin^2(x\xi_k + y\xi_m) dx dy = 2R_1 R_2.$$

Note that  $\|h_{k,m}^1\|^2 = \|\tilde{h}_{k,m}^1\|^2$ . Similar evaluations yield  $\|h_{k,m}^i\|^2 = \|\tilde{h}_{k,m}^i\|^2 = 1$  for  $i = 2, 3$ .

Now let us consider the eigen-value problem (20) for the tensors  $B_{V_i}$ . Let us introduce complex-valued vectors  $H_{k,m}^i$  by  $H_{k,m}^i = h_{k,m}^i + i\tilde{h}_{k,m}^i$ , so that

$$H_{k,m}^i(x, y, z) = e^{-z\sqrt{\xi_k^2 + \xi_m^2}} e^{i(\xi_k x + \xi_m y)} \begin{pmatrix} a_i(z, k, m) \\ b_i(z, k, m) \\ -ic_i(z, k, m) \end{pmatrix}.$$

Since  $\lambda_{k,m}^i = \tilde{\lambda}_{k,m}^i$ , we can rewrite (20) in the form

$$\int_0^\infty \int_{-R_1}^{R_1} \int_{-R_2}^{R_2} B_{V_i}(x_1 - x_2, y_1 - y_2, z_1, z_2) H_{k,m}^i(x_2, y_2, z_2) dx_2 dy_2 dz_2 = \lambda_{k,m}^i H_{k,m}^i(x_1, y_1, z_1) .$$

Let us first consider this eigen-value problem for  $B_{V_1}$ . Substituting  $H_{k,m}^1$  we find that

$$\begin{aligned} \int_0^\infty \int_{-R_1}^{R_1} \int_{-R_2}^{R_2} e^{-\imath(\xi_k \tau_x + \xi_m \tau_y)} B_{V_1}(\tau_x, \tau_y, z_1, z_2) dx_2 dy_2 \begin{pmatrix} a_1(z_2, k, m) \\ b_1(z_2, k, m) \\ -\imath c_1(z_2, k, m) \end{pmatrix} e^{-(z_2 - z_1) \sqrt{\xi_k^2 + \xi_m^2}} dz_2 \\ = \lambda_{k,m}^1 \begin{pmatrix} a_1(z_1, k, m) \\ b_1(z_1, k, m) \\ -\imath c_1(z_1, k, m) \end{pmatrix} . \end{aligned} \quad (21)$$

We notice that the inner integral is an approximation to the relevant spectral tensor

$$S_{V_1}(\xi_x, \xi_y, z_1, z_2) = \frac{1}{2\pi} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} e^{-\imath(\xi_x \tau_x + \xi_y \tau_y)} B_{V_1}(\tau_x, \tau_y, z_1, z_2) d\tau_x d\tau_y .$$

We use the approximation

$$S_{V_1}(\xi_x, \xi_y, z_1, z_2) \approx \widehat{S}_{V_1}(\xi_x, \xi_y, z_1, z_2),$$

where

$$\widehat{S}_{V_1}(\xi_x, \xi_y, z_1, z_2) = \frac{1}{2\pi} \int_{-R_1}^{R_1} \int_{-R_2}^{R_2} e^{-\imath(\xi_x \tau_x + \xi_y \tau_y)} B_{V_1}(\tau_x, \tau_y, z_1, z_2) d\tau_x d\tau_y .$$

At the points  $\xi_x = \xi_k, \xi_y = \xi_m$ ,

$$\widehat{S}_{V_1}(\xi_k, \xi_m, z_1, z_2) = \frac{1}{2\pi} \int_{-R_1}^{R_1} \int_{-R_2}^{R_2} e^{-\imath(\xi_k \tau_x + \xi_m \tau_y)} B_{V_1}(\tau_x, \tau_y, z_1, z_2) d\tau_x d\tau_y .$$

In what follow we will write for brevity  $S_{V_1}$  instead of  $\widehat{S}_{V_1}$ . The spectral tensor  $S_{V_1}$  has the form

$$S_{V_1}(\xi_k, \xi_m, z_1, z_2) = e^{-(z_1 + z_2)\rho} \times \begin{pmatrix} 1 + \beta^2 z_1 z_2 \frac{\xi_k^4}{\rho^2} - \beta(z_1 + z_2) \frac{\xi_k^2}{\rho} & (\beta z_1 \frac{\xi_k^2}{\rho} - 1) \beta z_2 \frac{\xi_k \xi_m}{\rho} & \imath(1 - \beta z_1 \frac{\xi_k^2}{\rho}) \beta z_2 \xi_k \\ \beta z_1 \frac{\xi_k \xi_m}{\rho} (\beta z_2 \frac{\xi_k^2}{\rho} - 1) & \beta^2 z_1 z_2 \frac{\xi_k^4}{\rho^2} & -\imath \beta^2 z_1 z_2 \frac{\xi_k^2 \xi_m}{\rho} \\ -\imath(1 - \beta z_2 \frac{\xi_k^2}{\rho}) \beta z_1 \xi_k & \imath \beta^2 z_1 z_2 \frac{\xi_k \xi_m^2}{\rho} & -\beta^2 z_1 z_2 \xi_k^2 \end{pmatrix} ,$$

where we use the notation  $\sqrt{\xi_k^2 + \xi_m^2} = \rho$ .

We decompose  $S_{V_1}$  as  $S_{V_1} = e^{-(z_1+z_2)\sqrt{\xi_k^2+\xi_m^2}}G(\xi_k, \xi_m, z_1)G_1(\xi_k, \xi_m, z_2)$  where  $G(\xi_k, \xi_m, z_1)$  is defined by (7), and

$$G_1(\xi_k, \xi_m, z_2) = \begin{pmatrix} 1 - \beta z_2 \frac{\xi_k^2}{\sqrt{\xi_k^2 + \xi_m^2}} & -\beta z_2 \frac{\xi_k \xi_m}{\sqrt{\xi_k^2 + \xi_m^2}} & i\beta z_2 \xi_k \\ 0 & 0 & 0 \\ 0 & 0 & 0 \end{pmatrix}.$$

Substituting this decomposition into (21) we get

$$\int_0^\infty G(\xi_k, \xi_m, z_1)G_1(\xi_k, \xi_m, z_2) e^{-2z_2\sqrt{\xi_k^2+\xi_m^2}} \begin{pmatrix} a_1(z_2, k, m) \\ b_1(z_2, k, m) \\ -ic_1(z_2, k, m) \end{pmatrix} dz_2 = \lambda_{k,m}^1 \begin{pmatrix} a_1(z_1, k, m) \\ b_1(z_1, k, m) \\ -ic_1(z_1, k, m) \end{pmatrix}.$$

Multiplying both sides of the last equation by

$$G^{-1}(\xi_x, \xi_y, z_1) = \mathbf{I} + \beta z_1 \begin{pmatrix} \frac{\xi_k^2}{\sqrt{\xi_k^2 + \xi_m^2}} & \frac{\xi_k \xi_m}{\sqrt{\xi_k^2 + \xi_m^2}} & i\xi_k \\ \frac{\xi_k \xi_m}{\sqrt{\xi_k^2 + \xi_m^2}} & \frac{\xi_m^2}{\sqrt{\xi_k^2 + \xi_m^2}} & i\xi_m \\ i\xi_k & i\xi_m & -\sqrt{\xi_k^2 + \xi_m^2} \end{pmatrix}, \quad (22)$$

and substituting the values of  $a_1, b_1, c_1$  we arrive at

$$\int_0^\infty e^{-2z_2\sqrt{\xi_k^2+\xi_m^2}} \begin{pmatrix} 1 - 2\beta\xi_k^2/(z_2\sqrt{\xi_k^2 + \xi_m^2}) + 2\beta^2\xi_k^2 z_2^2 \\ 0 \\ 0 \end{pmatrix} dz_2 = \lambda_{k,m}^1 \begin{pmatrix} 1 \\ 0 \\ 0 \end{pmatrix}.$$

After integration we get the result

$$\lambda_{k,m}^1 = \tilde{\lambda}_{k,m}^1 = (1 - \frac{(1-\beta)\beta\xi_k^2}{\xi_k^2 + \xi_m^2})/2\sqrt{\xi_k^2 + \xi_m^2}.$$

Analogous evaluation for the second and third series of eigen-vectors results in the desired formulae for  $\lambda_{k,m}^i, i = 2, 3$ . The proof of Lemma is complete.  $\square$

The expansions given in Theorem 2 follow from the Lemma and the splitting (18) and (19).  $\square$

## 4 General horizontally homogeneous and isotropic boundary excitations.

### 4.1 Homogeneous and isotropic excitations

Let us consider the boundary value problem (1) when  $\mathbf{g}$  is a homogeneous zero mean Gaussian vector random field with a correlation matrix  $B_g$ . The relevant spectral tensor  $S_g$  is related to  $B_g$  by

$$B_g(\tau'_x, \tau'_y) = F[S_g] = \frac{1}{2\pi} \int_{R^2} e^{i(\tau'_x \xi_x + \tau'_y \xi_y)} S_g(\xi_x, \xi_y) d\xi_x d\xi_y, \quad (23)$$

$$S_g(\xi_x, \xi_y) = F^{-1}[B_g] = \frac{1}{2\pi} \int_{R^2} e^{-i(\tau'_x \xi_x + \tau'_y \xi_y)} B_g(\tau'_x, \tau'_y) d\tau'_x d\tau'_y, \quad (24)$$

where  $\tau'_x = x'_1 - x'_2$  and  $\tau'_y = y'_1 - y'_2$ . From (4) and (2) we obtain

$$\begin{aligned} B_u(x_1, y_1; x_2, y_2) &= \frac{1}{2\pi} \int_{R^2} d\xi_x d\xi_y \int_{R^4} K(x_1 - x'_2 - \tau'_x, y_1 - y'_2 - \tau'_y, z_1) \\ &\quad \times S_g(\xi_x, \xi_y) K(x_2 - x'_2, y_2 - y'_2, z_2) e^{i(\tau'_x \xi_x + \tau'_y \xi_y)} d\tau'_x d\tau'_y dx'_2 dy'_2, \end{aligned}$$

or in the variables  $w_x = x_1 - x'_2 - \tau'_x$ ,  $w_y = y_1 - y'_2 - \tau'_y$ ,

$$\begin{aligned} B_u &= \frac{1}{2\pi} \int_{R^2} d\xi_x d\xi_y \int_{R^4} K(w_x, w_y, z_1) e^{-i(w_x \xi_x + w_y \xi_y)} dw_x dw_y \\ &\quad \times S_g(\xi_x, \xi_y) K(x_2 - x'_2, y_2 - y'_2, z_2) e^{i((x_1 - x'_2)\xi_x + (y_1 - y'_2)\xi_y)} dx'_2 dy'_2. \end{aligned}$$

Now taking the new variables  $q_x = x'_2 - x_2$ ,  $q_y = y'_2 - y_2$  we get

$$\begin{aligned} B_u &= \int_{R^2} d\xi_x d\xi_y F^{-1}[K](\xi_x, \xi_y, z_1) S_g(\xi_x, \xi_y) \\ &\quad \times \int_{R^2} F^{-1}[K](-q_x, -q_y, z_2) e^{-i(q_x \xi_x + q_y \xi_y)} e^{i(\xi_x(x_1 - x_2) + \xi_y(y_1 - y_2))} dq_x dq_y. \end{aligned}$$

Using the change of variables  $\tau_x = x_1 - x_2$ ,  $\tau_y = y_1 - y_2$  we arrive at

$$B_u(\tau_x, \tau_y, z_1, z_2) = 2\pi \int_{R^2} F^{-1}[K](\xi_x, \xi_y, z_1) S_g(\xi_x, \xi_y) F^{-1}[K](-q_x, -q_y, z_2) e^{i(\xi_x \tau_x + \xi_y \tau_y)} d\xi_x d\xi_y.$$

From the last formula we see that the correlation tensor  $B_u$  depends on the differences  $x_1 - x_2$ , and  $y_1 - y_2$ , i.e.  $\mathbf{u}$  is partially homogeneous. After taking the Fourier transform we get (see the proof of Theorem 1)

$$B_u(\tau_x, \tau_y, z_1, z_2) = \frac{1}{2\pi} \int_{R^2} e^{-\sqrt{\xi_x^2 + \xi_y^2}(z_1 + z_2)} G(\xi_x, \xi_y, z_1) S_g(\xi_x, \xi_y) G^*(\xi_x, \xi_y, z_2) e^{i(\xi_x \tau_x + \xi_y \tau_y)} d\xi_x d\xi_y$$

hence the partial spectral tensor looks like

$$S_u(\xi_x, \xi_y, z_1, z_2) = e^{-\sqrt{\xi_x^2 + \xi_y^2}(z_1 + z_2)} G(\xi_x, \xi_y, z_1) S_g(\xi_x, \xi_y) G^*(\xi_x, \xi_y, z_2).$$

Note that if  $\mathbf{g}$  is an isotropic field, then  $B_g$  depends only on  $r = \sqrt{\tau_x^2 + \tau_y^2}$ , and we will write in this case  $B_g(r)$ . Then, the relevant spectral representation simplifies to

$$S_g(\xi_x, \xi_y) = \int_0^\infty B_g(r') r' J_0(r' \rho) dr'. \quad (25)$$

Indeed, by the definition (24),

$$S_g = \frac{1}{2\pi} \int_{R^2} e^{-i(\xi_x \tau'_x + \xi_y \tau'_y)} B_g(\tau'_x, \tau'_y) d\xi_x d\xi_y,$$

or in the polar coordinates  $\tau'_x = r' \cos \varphi$ ,  $\tau'_y = r' \sin \varphi$  and  $\xi_x = \rho \cos \psi$ ,  $\xi_y = \rho \sin \psi$

$$S_g = \frac{1}{2\pi} \int_0^\infty \int_0^{2\pi} e^{-r'\rho \cos(\varphi-\psi)} B_g(r', \varphi) r' dr' d\varphi .$$

If  $\mathbf{g}$  is isotropic, the tensor  $B_g$  does not depend on the angle  $\varphi$ , hence

$$S_g = \frac{1}{2\pi} \int_0^\infty B_g(r') r' \int_0^{2\pi} e^{-r'\rho \cos(\varphi-\psi)} d\varphi dr' .$$

The inner integral is the Bessel function  $J_0(r'\rho)$ , and we get the representation (25). Then,

$$\begin{aligned} B_u(\tau_x, \tau_y, z_1, z_2) &= \int_0^\infty \int_0^{2\pi} e^{-\rho(z_1+z_2)} G(\rho, \psi, z_1) \int_0^\infty B_g(r') r' J_0(r'\rho) dr' \\ &\quad \times G^*(\rho, \psi, z_2) e^{i\rho(\cos \psi \tau_x + \sin \psi \tau_y)} \rho d\rho d\psi . \end{aligned} \quad (26)$$

Notice that in the case of a white noise

$$B_g(r')_{ij} = \frac{\delta_{ij} \delta(r')}{2\pi r'} ,$$

so

$$B_u(\tau_x, \tau_y, z_1, z_2) = \frac{1}{2\pi} \int_0^\infty \int_0^{2\pi} e^{-\rho(z_1+z_2)} G(\rho, \psi, z_1) G^*(\rho, \psi, z_2) e^{i\rho(\cos \psi \tau_x + \sin \psi \tau_y)} \rho d\rho d\psi .$$

In polar coordinates,  $\tau_x = R_\tau \cos \phi$ ,  $\tau_y = R_\tau \sin \phi$ , hence

$$B_u(R_\tau, \phi, z_1, z_2) = \frac{1}{2\pi} \int_0^\infty \int_0^{2\pi} e^{-\rho(z_1+z_2)} G(\rho, \psi, z_1) G^*(\rho, \psi, z_2) e^{i\rho R_\tau \cos(\psi-\phi)} \rho d\rho d\psi .$$

The entries  $\{B_u\}_{ij}$ ,  $i, j = 1, 2, 3$  can be evaluated explicitly by the formulae (40)-(51), from Appendix B, and we get the same representation as in Theorem 1.

In the general case, to express  $B_u$  through  $B_g$ , it is convenient to introduce a new notation  $\hat{B}_u$  and  $\hat{B}_g$  by arranging the entries of the correlation tensor in a 9-dimensional column vector. Then the representation (26) is conveniently written as

$$\hat{B}_u(R_\tau, \phi, z_1, z_2) = \int_0^\infty A(R_\tau, \phi, z_1, z_2, r') \hat{B}_g(r') dr'$$

where

$$A(R_\tau, \phi, z_1, z_2, r')_{9 \times 9} = \frac{1}{2\pi} \int_{R^2} e^{-\rho(z_1+z_2)} G(\rho, \psi, z_1) \otimes G^*(\rho, \psi, z_2) e^{i\rho R_\tau \cos(\psi-\phi)} J_0(r'\rho) \rho d\rho d\psi .$$

Here we denote by  $\otimes$  a tensor product of two matrices. The entries  $A_{ij}$  can be evaluated explicitly, as it was done in the case of the matrix  $B_u$ . In the next section we present an example.

## 4.2 An example of boundary excitations with finite correlation length

In this section we analyze an example with boundary excitations having a finite correlation length.

So let us consider the boundary problem (1) where the isotropic Gaussian random field  $\mathbf{g}$  is defined by the following spectral tensor

$$S_g(\xi_x, \xi_y) = I L e^{-\rho L}, \quad \rho = \sqrt{\xi_x^2 + \xi_y^2} \quad (27)$$

where  $I$  is an identity matrix, and  $L$  is the correlation lengths of  $g_i$ . Then,

$$B_u(R_\tau, \phi, z_1, z_2) = \frac{L}{2\pi} \int_0^\infty \int_0^{2\pi} e^{-\rho(z_1+z_2+L)} G(\rho, \psi, z_1) G^*(\rho, \psi, z_2) e^{i\rho R_\tau \cos(\psi-\phi)} \rho d\rho d\psi.$$

Using the formulae (40)-(51) presented in the Appendix B we carry out the integration explicitly. This yields

$$\begin{aligned} B_u = & \frac{L}{2\pi r_L^3} \left\{ [(1-\beta)\bar{z} + L] I \right. \\ & + \frac{3\beta}{r_L^2} \begin{pmatrix} \tau_x^2 \bar{z} & \tau_x \tau_y \bar{z} & \tau_x(z_1 - z_2)(\bar{z} + L) \\ \tau_x \tau_y \bar{z} & \tau_y^2 \bar{z} & \tau_y(z_1 - z_2)(\bar{z} + L) \\ \tau_x(z_1 - z_2)(\bar{z} + L) & \tau_y(z_1 - z_2)(\bar{z} + L) & \bar{z}(\bar{z} + L)^2 \end{pmatrix} \\ & \left. + \frac{6\beta^2 z_1 z_2}{r_L^4} \begin{pmatrix} (r_L^2 - 5\tau_x^2)(\bar{z} + L) & -5\tau_x \tau_y (\bar{z} + L) & \tau_x(5(\bar{z} + L)^2 - r_L^2) \\ -5\tau_x \tau_y (\bar{z} + L) & (r_L^2 - 5\tau_y^2)(\bar{z} + L) & \tau_y(5(\bar{z} + L)^2 - r_L^2) \\ \tau_x(r_L^2 - 5(\bar{z} + L)^2) & \tau_y(r_L^2 - 5(\bar{z} + L)^2) & (\bar{z} + L)(2r_L^2 - 5(\tau_x^2 + \tau_y^2)) \end{pmatrix} \right\}, \quad (28) \end{aligned}$$

where

$$r_L = \sqrt{\tau_x^2 + \tau_y^2 + (z_1 + z_2 + L)^2}, \quad \bar{z} = z_1 + z_2.$$

The Karhunen-Loève expansion in this case takes the form

$$\begin{aligned} \mathbf{u}(x, y, z) = & \frac{1}{2\sqrt{R_1 R_2}} \sum_{\substack{k, m = -\infty \\ (k, m) \neq (0, 0)}}^{\infty} e^{-\pi(z+L/2)\sqrt{(k/R_1)^2 + (m/R_2)^2}} \times \\ & \left[ (\Re G(k, m, z) \boldsymbol{\zeta}_{k,m} + \Im G(k, m, z) \boldsymbol{\eta}_{k,m}) \cos \pi \left( \frac{kx}{R_1} + \frac{my}{R_2} \right) \right. \\ & \left. + (\Re G(k, m, z) \boldsymbol{\eta}_{k,m} - \Im G(k, m, z) \boldsymbol{\zeta}_{k,m}) \sin \pi \left( \frac{kx}{R_1} + \frac{my}{R_2} \right) \right] \quad (29) \end{aligned}$$

where  $\boldsymbol{\eta}_{k,m}$ ,  $\boldsymbol{\zeta}_{k,m}$  are families of independent standard Gaussian vectors, and  $G(k, m, z)$  is defined in (14). The relevant series expansion for the correlation tensor  $B_u$  is

$$\begin{aligned} B_u(\tau_x, \tau_y, z_1, z_2) = & \frac{1}{4R_1 R_2} \sum_{\substack{k, m = -\infty \\ (k, m) \neq (0, 0)}}^{\infty} e^{-\pi(z_1+z_2+L)\sqrt{(k/R_1)^2 + (m/R_2)^2}} \times \\ & \left[ \Re \{ G(k, m, z) G^*(k, m, z) \} \cos \pi \left( \frac{k\tau_x}{R_1} + \frac{m\tau_y}{R_2} \right) \right. \\ & \left. - \Im \{ G(k, m, z) G^*(k, m, z) \} \sin \pi \left( \frac{k\tau_x}{R_1} + \frac{m\tau_y}{R_2} \right) \right]. \quad (30) \end{aligned}$$

## 5 Simulation results

Let us present some simulation results for two cases: (1) the boundary excitations are produced by a 2D white noise, (2) the boundary displacements have a finite correlation length. The white noise case is validated by a comparison of calculations carried out according to the K-L expansion (17) with the exact results (5). In the case of finite correlation  $L$  we compare the correlation functions calculated according to the K-L series expansion (30) and the direct Monte Carlo simulations based on (29) against the exact result (28). In all calculations however the Monte Carlo errors were smaller than 0.5% so that the exact and plotted curves are undistinguishable on the graph. Therefore we present only the exact and series based calculation results.

In Figure 1 (left panel) the correlations  $B_{ij}$  as functions of the longitudinal increment  $x = x_1 - x_2$  are plotted for the case of white noise excitations, for fixed values of  $y_1 = y_2 = 1$  and  $z_1 = z_2 = 1$ . Here we compare the K-L expansion (17) and the exact result (5), showing an excellent agreement. In the right panel of Figure 1 we just show the exact results for the correlations  $B_{11}$  and  $B_{33}$  as functions of the vertical coordinate.

The results for the case of finite correlations are presented in Figure 2. In this figure (left panel) we plot all the correlation and cross-correlation functions versus the longitudinal coordinate, also for fixed values of  $y_1 = y_2$  and  $z_1 = z_2 = 1$ , for  $L = 1$ . Here both the exact results and the series-based calculations are shown which are practically coincident. To show the impact of the correlation length  $L$  of the boundary input excitations, we present in Figure 2 (right panel) the correlation function  $B_{33}(x)$  for  $L = 1, 2$  and  $L = 4$ . It is clearly seen that with the increase of the correlation length  $L$  the correlation function  $B_{33}$  gets heavier tails, but as to the intensity of fluctuations at small values of  $x$ , there is no monotone behaviour. So for small values of  $x$ , the correlations at  $L = 1$  and  $L = 2$  are almost the same, while for  $L = 4$  the correlation is considerably less. It is interesting to notice that for  $B_{22}$  the situation is converse: the correlations for  $L = 4$  are larger than those at  $L = 1$ . Note also that the correlation functions  $B_{11}$  and  $B_{22}$  for  $L = 1$  are close at small distances, and get closer after  $x = 10$  while in between, there is a clear difference.

Further interesting issues are: how propagate the boundary excitations in the vertical direction, and what is the influence of the input correlation length  $L$ . In Figure 3 (left panel) we show the vertical profile of the correlation function  $B_{33}$  for three different values of  $L$ , for fixed values  $\Delta x = x_1 - x_2 = y_1 - y_2 = 1$ . All three curves are monotonically decreasing with the height, but notice that the case  $L = 1 = \Delta x$  is a bit different, having a gaussian type behaviour at small heights. This behaviour is more pronounced for larger values of  $\Delta x$ , see the right panel of Figure 3 where we plot the correlations  $B_{33}$  and  $B_{11}$  for  $\Delta x = 3$ . Here we see that for the cases when  $L < \Delta x$  these correlations first increase, reaching a maximum value, and then decrease, while they are monotonically decreasing if  $L > \Delta x$ . For larger value of  $\Delta x$ , the non-monotonic behaviour is more pronounced, see Figure 4 (left panel). Finally, the impact of the correlation length  $L$  on the cross-correlations is seen from the results presented in the right panel of Figure 4.

To conclude we remark that all these numerical results serve as illustrations and validations of the derived exact representations. As to the choice of an efficient Monte Carlo simulation of the random solution, we would suggest to use a stratified version of the Randomized spectral method or, if one wishes to have samples with good ergodic properties, the Fourier-wavelet expansion can be constructed (for details see [11]).

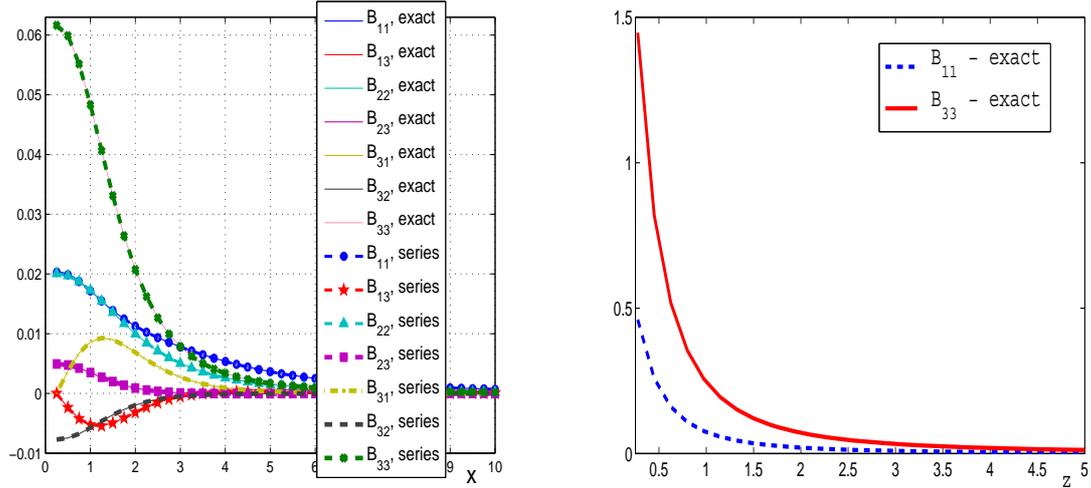


Figure 1: The case of white noise excitations. Left panel: The correlation functions  $B_{ij}$  versus the horizontal coordinate  $x = x_1 - x_2$ , for fixed  $y_1 = y_2 = 1$  and  $z_1 = z_2 = 1$ . Compared are the exact results with the series expansions. The elasticity constant was fixed as  $\alpha = 2$ , the number of harmonics in the K-L expansion was  $k = m = 200$ , and the cut-off parameters  $R_1, R_2$  were taken as  $R_1 = R_2 = 100$ . Right panel: The correlations functions  $B_{11}$  and  $B_{33}$  versus the vertical coordinate  $z = z_2$  (at  $z_1 = 0.1$ ), for the same fixed values of  $x_1, x_2, y_1$  and  $y_2$ .

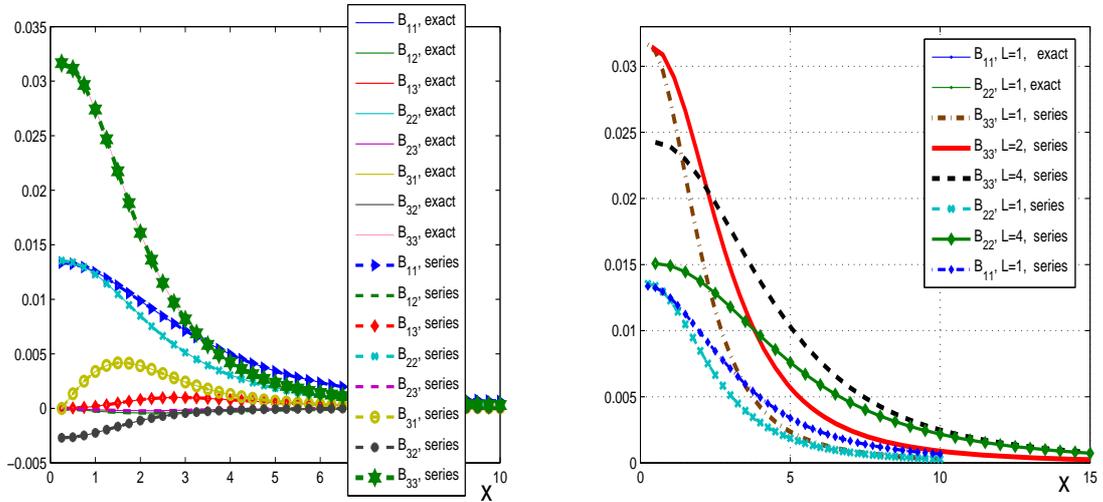


Figure 2: The case of finite correlation length  $L$ . Left panel: the correlation functions  $B_{ij}$  versus the horizontal coordinate  $x = x_1 - x_2$ , for fixed  $y_1 = y_2$  and  $z_1 = z_2 = 1$ , exact solutions and series representations. Right panel: The correlation function  $B_{33}$  is shown for three different values of the correlation length  $L$ ,  $L = 1, 2$  and  $4$ , the correlation function  $B_{22}$ , for  $L = 1$ , and  $L = 4$ , and the correlation function  $B_{11}$ , for  $L = 1$ . All functions are shown both exact and as series expansions; other parameters the same as in the left panel.

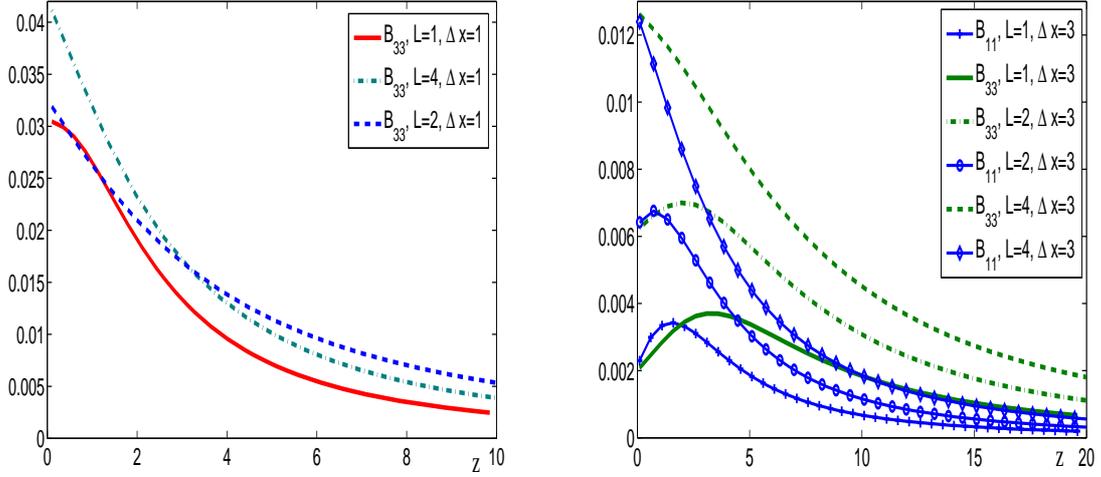


Figure 3: The case of finite correlation length  $L$ . Left panel: the correlation function  $B_{33}$  versus the vertical coordinate  $z$  (for fixed  $\Delta x = x_1 - x_2 = y_1 - y_2 = 1$ , exact solutions) plotted for three different values of the correlation length  $L$ . Right panel: The correlation functions  $B_{33}$  and  $B_{11}$  versus the vertical coordinate are plotted for three different values of the correlation length  $L$ ,  $L = 1, 2$  and  $4$ , for fixed  $\Delta x = 3$ .

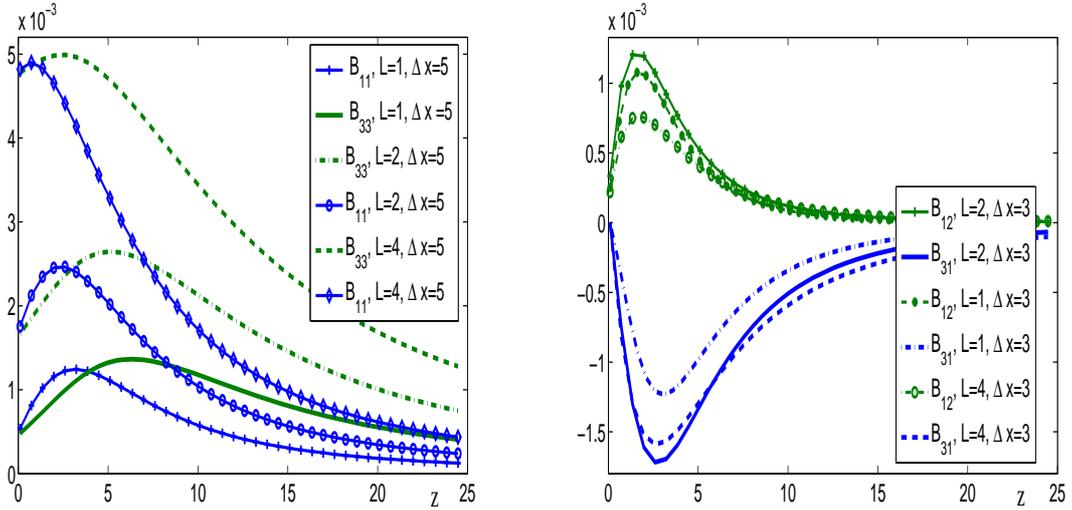


Figure 4: The case of finite correlation length  $L$ . Left panel: the same as in Figure 3, right panel, but for  $\Delta x = 5$ . Right panel: the same as in Figure 3, right panel, but for the cross-correlation functions.

## Appendix A.

The Fourier transforms of function  $g(x, y, \cdot)$  over the variables  $x, y$  are defined by

$$G(\xi_x, \xi_y, \cdot) = F^{-1}[g(x, y, \cdot)] = \frac{1}{2\pi} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} e^{-i(x\xi_x + y\xi_y)} g(x, y, \cdot) dx dy ,$$

and

$$g(x, y, \cdot) = F[G(\xi_x, \xi_y, \cdot)] = \frac{1}{2\pi} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} e^{i(x\xi_x + y\xi_y)} G(\xi_x, \xi_y, \cdot) d\xi_x d\xi_y .$$

We use the simple property of the Fourier transformation

$$F^{-1}[D_{x,y}^{\alpha+\gamma} g(x, y, z)] = (i\xi)^{\alpha+\gamma} F^{-1}[g(x, y, z)] , \quad F^{-1}[D_z^\alpha g(x, y, z)] = D_z^\alpha F^{-1}[g(x, y, z)] . \quad (31)$$

It is known that (see [12])

$$I_0 = F^{-1}\left[\frac{1}{r}\right] = \frac{1}{\sqrt{\xi_x^2 + \xi_y^2}} e^{-z\sqrt{\xi_x^2 + \xi_y^2}}, \quad r = \sqrt{x^2 + y^2 + z^2},$$

where  $x$  and  $y$  are the variables of the Fourier transform, and  $z$  is a free variable. Taking the derivatives it is easy to find that

$$F^{-1}\left[\frac{z}{r^3}\right] = -F^{-1}\left[\frac{\partial I_0}{\partial z}\right] = e^{-z\sqrt{\xi_x^2 + \xi_y^2}}, \quad (32)$$

and

$$F^{-1}\left[\frac{z x^2}{r^5}\right] = \frac{1}{3} \frac{\partial^2}{\partial \xi_x^2} \left(\frac{\partial I_0}{\partial z}\right) = \frac{1}{3} \left( e^{-z\sqrt{\xi_x^2 + \xi_y^2}} - \frac{z \xi_x^2}{\sqrt{\xi_x^2 + \xi_y^2}} e^{-z\sqrt{\xi_x^2 + \xi_y^2}} \right). \quad (33)$$

We can rewrite the last formula as follows

$$-\frac{z \xi_x^2}{\sqrt{\xi_x^2 + \xi_y^2}} e^{-z\sqrt{\xi_x^2 + \xi_y^2}} = 3F^{-1}\left[\frac{x^2 z}{r^5}\right] - F^{-1}\left[\frac{z}{r^3}\right],$$

a similar formula for the variable  $y$

$$-\frac{z \xi_y^2}{\sqrt{\xi_x^2 + \xi_y^2}} e^{-z\sqrt{\xi_x^2 + \xi_y^2}} = 3F^{-1}\left[\frac{z y^2}{r^5}\right] - F^{-1}\left[\frac{z}{r^3}\right],$$

and for the product  $xy$

$$F^{-1}\left[\frac{xy}{r^5}\right] = \frac{1}{3} F^{-1}\left[\frac{\partial^2}{\partial x \partial y} \frac{1}{r}\right] = -\frac{1}{3} \frac{\xi_x \xi_y}{\sqrt{\xi_x^2 + \xi_y^2}} e^{-z\sqrt{\xi_x^2 + \xi_y^2}} .$$

By the property (31) we get

$$-i \xi_x e^{-z\sqrt{\xi_x^2 + \xi_y^2}} = 3F^{-1}\left[\frac{z x}{r^5}\right], \quad -i \xi_y e^{-z\sqrt{\xi_x^2 + \xi_y^2}} = 3F^{-1}\left[\frac{z y}{r^5}\right]. \quad (34)$$

$$F^{-1}\left[\frac{z^3}{r^5}\right] = -\frac{z^2}{3}F^{-1}\left[\frac{\partial}{\partial z}\left(\frac{1}{r^3}\right)\right] = \frac{1}{3}\left(e^{-z\sqrt{\xi_x^2+\xi_y^2}} + z\sqrt{\xi_x^2+\xi_y^2}e^{-z\sqrt{\xi_x^2+\xi_y^2}}\right), \quad (35)$$

or

$$z\sqrt{\xi_x^2+\xi_y^2}e^{-z\sqrt{\xi_x^2+\xi_y^2}} = 3F^{-1}\left[\frac{z^3}{r^5}\right] - F^{-1}\left[\frac{z}{r^3}\right].$$

We need also the next representations

$$\xi_x^2 e^{-z\sqrt{\xi_x^2+\xi_y^2}} = -\frac{\partial}{\partial z}\left[\frac{\xi_x^2}{\sqrt{\xi_x^2+\xi_y^2}}e^{-z\sqrt{\xi_x^2+\xi_y^2}}\right] = -F^{-1}\left[\frac{15zx^2}{r^7} - \frac{3z}{r^5}\right]. \quad (36)$$

Here and in what follows we write  $z$  instead of  $z_1 + z_2$ ,

$$\xi_y^2 e^{-z\sqrt{\xi_x^2+\xi_y^2}} = -\frac{\partial}{\partial z}\left[\frac{\xi_y^2}{\sqrt{\xi_x^2+\xi_y^2}}e^{-z\sqrt{\xi_x^2+\xi_y^2}}\right] = -F^{-1}\left[\frac{15zy^2}{r^7} - \frac{3z}{r^5}\right], \quad (37)$$

$$\xi_x\xi_y e^{-z\sqrt{\xi_x^2+\xi_y^2}} = -\frac{\partial}{\partial z}\left(\frac{\xi_x\xi_y}{\sqrt{\xi_x^2+\xi_y^2}}e^{-z\sqrt{\xi_x^2+\xi_y^2}}\right) = -15F^{-1}\left[\frac{zxy}{r^7}\right], \quad (38)$$

and finally, the last group

$$\begin{aligned} -i\xi_x\sqrt{\xi_x^2+\xi_y^2}e^{-z\sqrt{\xi_x^2+\xi_y^2}} &= \frac{\partial}{\partial z}\left(i\xi_x e^{-z\sqrt{\xi_x^2+\xi_y^2}}\right) = -F^{-1}\left[\frac{3x}{r^5} - \frac{15z^2x}{r^7}\right], \\ -i\xi_y\sqrt{\xi_x^2+\xi_y^2}e^{-z\sqrt{\xi_x^2+\xi_y^2}} &= \frac{\partial}{\partial z}\left(i\xi_y e^{-z\sqrt{\xi_x^2+\xi_y^2}}\right) = -F^{-1}\left[\frac{3y}{r^5} - \frac{15z^2y}{r^7}\right]. \end{aligned} \quad (39)$$

## Appendix B.

The following formulae are obtained by using the known integral cited in [6]:

$$\frac{1}{2\pi}\int_0^\infty\int_0^{2\pi}e^{iR_\tau\rho\cos(\varphi-\phi)}e^{-\rho z}\rho d\varphi d\rho = \int_0^\infty e^{-\rho z}J_0(\rho R_\tau)\rho d\rho = \frac{z}{(z^2+R_\tau^2)^{3/2}}. \quad (40)$$

To evaluate the integral

$$\frac{1}{2\pi}\int_0^\infty\int_0^{2\pi}e^{iR_\tau\rho\cos(\varphi-\phi)}e^{-\rho z}\xi_x^2 d\varphi d\rho\Big|_{\xi_x=\rho\cos\varphi}$$

we use the change of variables  $\varphi' = \varphi - \phi$ , so that

$$\begin{aligned} &\frac{1}{2\pi}\int_0^\infty\int_{-\phi}^{2\pi-\phi}e^{iR_\tau\rho\cos\varphi'}e^{-\rho z}\rho^2(\cos^2\varphi'\cos^2\phi+\sin^2\varphi'\sin^2\phi)d\varphi'd\rho \\ &= \int_0^\infty e^{-i\rho z}\left[\left(\frac{J_1(\rho R_\tau)}{\rho R_\tau}-J_2(\rho R_\tau)\right)\cos^2\phi+\frac{J_1(\rho R_\tau)}{\rho R_\tau}\sin^2\phi\right]\rho^2 d\rho \\ &= \frac{1}{(z^2+R_\tau^2)^{3/2}}\left(1-\frac{3R_\tau^2\cos^2\phi}{z^2+R_\tau^2}\right) = \frac{1}{(z^2+R_\tau^2)^{3/2}}\left(1-\frac{3\tau_x^2}{z^2+R_\tau^2}\right). \end{aligned} \quad (41)$$

Similar calculation for  $(B_u)_{22}$  yields

$$\begin{aligned}
& \frac{1}{2\pi} \int_0^\infty \int_0^{2\pi} e^{\iota R_\tau \rho \cos(\varphi-\phi)} e^{-\rho z} \xi_y^2 d\varphi d\rho \Big|_{\xi_y=\rho \sin \varphi, \varphi'=\varphi-\phi} \\
&= \frac{1}{2\pi} \int_0^\infty \int_0^{2\pi} e^{\iota R_\tau \rho \cos \varphi'} e^{-\rho z} \rho^2 (\cos^2 \varphi' \sin^2 \phi + \sin^2 \varphi' \cos^2 \phi) d\varphi' d\rho \\
&= \int_0^\infty e^{-\rho z} \left[ \left( \frac{J_1(\rho R_\tau)}{\rho R} - J_2(\rho R) \right) \sin^2 \phi + \frac{J_1(\rho R_\tau)}{\rho R_\tau} \cos^2 \phi \right] \rho^2 d\rho \\
&= \frac{1}{(z^2 + R_\tau^2)^{3/2}} \left( 1 - \frac{3R_\tau^2 \sin^2 \phi}{z^2 + R_\tau^2} \right) = \frac{1}{(z^2 + R_\tau^2)^{3/2}} \left( 1 - \frac{3\tau_y^2}{z^2 + R_\tau^2} \right). \tag{42}
\end{aligned}$$

Further, for  $B_{u12}$  we get

$$\begin{aligned}
& \frac{1}{2\pi} \int_0^\infty \int_0^{2\pi} e^{\iota R_\tau \rho \cos(\varphi-\phi)} e^{-\rho z} \xi_x \xi_y d\varphi d\rho \Big|_{\xi_x=\rho \cos \varphi, \xi_y=\rho \sin \varphi} \\
&= \frac{1}{2\pi} \int_0^\infty \int_0^{2\pi} e^{\iota R_\tau \rho \cos \varphi'} e^{-\rho z} \rho^2 (\cos^2 \varphi' \sin^2 \phi + \sin^2 \varphi' \cos^2 \phi) d\varphi' d\rho \\
&= \int_0^\infty e^{-\rho z} \left[ \left( \frac{J_1(\rho R)}{\rho R_\tau} - J_2(\rho R) \right) \cos \phi \sin \phi - \frac{J_1(\rho R)}{\rho R_\tau} \cos \phi \sin \phi \right] \rho^2 d\rho \\
&= -\frac{3\tau_x \tau_y}{(z^2 + R_\tau^2)^{5/2}}. \tag{43}
\end{aligned}$$

For the last element  $(B_u)_{13}$  we get

$$\begin{aligned}
& \frac{1}{2\pi} \int_0^\infty \int_0^{2\pi} e^{\iota R_\tau \rho \cos(\varphi-\phi)} e^{-\rho z} \xi_x d\varphi d\rho \Big|_{\xi_x=\rho \cos \varphi} \\
&= \frac{1}{2\pi} \int_0^\infty \int_0^{2\pi} e^{\iota R_\tau \rho \cos \varphi'} e^{-\rho z} \rho^2 \cos \varphi' \cos \phi d\varphi' d\rho \\
&= \iota \int_0^\infty e^{-\rho z} J_1(\rho R_\tau) \cos \phi \rho^2 d\rho = \frac{3R_\tau \iota}{(z^2 + R_\tau^2)^{5/2}} \cos \phi = \frac{3z \iota \tau_x}{(z^2 + R_\tau^2)^{5/2}}, \tag{44}
\end{aligned}$$

$$\frac{1}{2\pi} \int_0^\infty \int_0^{2\pi} e^{\iota R_\tau \rho \cos(\varphi-\phi)} e^{-\rho z} \rho^2 d\varphi d\rho = \int_0^\infty e^{-\rho z} J_0(\rho R_\tau) \rho^2 d\rho = \frac{2z^2 - R_\tau^2}{(z^2 + R_\tau^2)^{5/2}}, \tag{45}$$

$$\begin{aligned}
& \frac{1}{2\pi} \int_0^\infty \int_0^{2\pi} e^{\iota R_\tau \rho \cos(\varphi-\phi)} e^{-\rho z} \xi_x^2 d\varphi d\rho \Big|_{\xi_x=\rho \cos \varphi, \varphi'=\varphi-\phi} \\
&= \int_0^\infty e^{-\rho z} \left( \frac{J_1(\rho R_\tau)}{\rho R_\tau} - J_2(\rho R_\tau) \cos^2 \phi \right) \rho^3 d\rho = \frac{3z}{(z^2 + R_\tau^2)^{5/2}} \left( 1 - \frac{5\tau_x^2}{z^2 + R_\tau^2} \right), \tag{46}
\end{aligned}$$

and

$$\begin{aligned} & \frac{1}{2\pi} \int_0^\infty \int_0^{2\pi} e^{\imath R_\tau \rho \cos(\varphi-\phi)} e^{-\rho z} \xi_y^2 d\varphi \rho d\rho \Big|_{\xi_y=\rho \sin \varphi, \varphi'=\varphi-\phi} \\ &= \int_0^\infty e^{-\rho z} \left( \frac{J_1(\rho R_\tau)}{\rho R_\tau} - J_2(\rho R_\tau) \sin^2 \phi \right) \rho^3 d\rho = \frac{3z}{(z^2 + R_\tau^2)^{5/2}} \left( 1 - \frac{5\tau_y^2}{z^2 + R_\tau^2} \right), \end{aligned} \quad (47)$$

$$\begin{aligned} & \frac{1}{2\pi} \int_0^\infty \int_0^{2\pi} e^{\imath R_\tau \rho \cos(\varphi-\phi)} e^{-\rho z} \xi_x \xi_y d\varphi \rho d\rho \\ &= - \int_0^\infty e^{-\rho z} J_2(\rho R_\tau) \cos \phi \sin \phi \rho^3 d\rho = -z \frac{15\tau_x \tau_y}{(z^2 + R_\tau^2)^{7/2}}, \end{aligned} \quad (48)$$

$$\frac{1}{2\pi} \int_0^\infty \int_0^{2\pi} e^{\imath R_\tau \rho \cos(\varphi-\phi)} e^{-\rho z} d\varphi \rho^3 d\rho = \int_0^\infty e^{-\rho z} J_0(\rho R_\tau) \rho^3 d\rho = 3z \frac{2z^2 - 3R_\tau^2}{(z^2 + R_\tau^2)^{7/2}}, \quad (49)$$

and

$$\begin{aligned} & \frac{1}{2\pi} \int_0^\infty \int_0^{2\pi} e^{\imath R_\tau \rho \cos(\varphi-\phi)} e^{-\rho z} \xi_x d\varphi \rho^2 d\rho \Big|_{\xi_x=\rho \cos \varphi} \\ &= \frac{1}{2\pi} \int_0^\infty \int_0^{2\pi} e^{\imath R_\tau \rho \cos \varphi'} e^{-\rho z} \rho^3 \cos \varphi' \cos \phi d\varphi' d\rho \\ &= \imath \int_0^\infty e^{-\rho z} J_1(\rho R_\tau) \cos \phi \rho^3 d\rho = \imath \frac{3\tau_x(4z^2 - R_\tau^2)}{(z^2 + R_\tau^2)^{7/2}}, \end{aligned} \quad (50)$$

$$\frac{1}{2\pi} \int_0^\infty \int_0^{2\pi} e^{\imath R_\tau \rho \cos(\varphi-\phi)} e^{-\rho z} \xi_y d\varphi \rho^2 d\rho \Big|_{\xi_y=\rho \sin \varphi} = \imath \frac{3\tau_y(4z^2 - R_\tau^2)}{(z^2 + R_\tau^2)^{7/2}}. \quad (51)$$

## References

- [1] R. Piva, C.M. Casciola and E. De Angelis. Turbulence of drag-reducing polymer solutions. In: *Advances in Turbulence XI: Proceedings of the 11th EUROMECH European Turbulence Conference, June 25-28, 2007, Porto, Portugal*; Ed: Von JosÁl M. L. M. Palma, A. Silva Lopes, Springer, 2007.
- [2] Ove Detlevsen. Extremes of random fields over arbitrary domains with applications to concrete rupture stresses. *Probabilistic Engineering Mechanics*, vol.19 (2004), issue 4, 373-384.

- [3] Deville, Michel ; Machiels, Luc. Numerical simulation of randomly forced turbulent flows, *J. Comput. Phys.*, vol. 145 (1998), 246-279.
- [4] G. Dagan. *Flow and Transport in Porous Formations*. Springer-Verlag, Berlin - Heidelberg, New York, 1989.
- [5] Roger G. Ghanem, Pol D. Spanos. *Stochastic finite elements. A spectral approach*. Courier Dover Publications, 2003.
- [6] Gradstein, I.S. and Rygyk, I.M. *Tables of Integrals, Sums, Series and Products*. Nauka, Moscow, 1971 (in Russian).
- [7] Thomas Y. Hou and Xiao-Hui Wu. A Multiscale Finite Element Method for Elliptic Problems in Composite Materials and Porous Media. *Journal of Computational Physics*, vol.134 (1997), 169-189.
- [8] Akira Ishimaru. *Wave propagation and scattering in random media*. Wiley-IEEE Press, 1999.
- [9] V.M. Kaganer, R. Köhler, M. Schmidbauer, and R. Opitz. X-ray diffraction peaks due to misfit dislocations in heteroepitaxial structures. *Phys. Rev. B*, vol 55 (1997), N3, 1793-1810.
- [10] Jari Kaipio, Ville Kolehmainen, Erkki Somersalo, and Marko Vauhkonen. Statistical inversion and Monte Carlo sampling methods in electrical impedance tomography. *Inverse problems*, **16** (2000), 1487-1522.
- [11] P. Kramer, O. Kurbanmuradov, and K. Sabelfeld. Comparative Analysis of Multiscale Gaussian Random Field Simulation Algorithms. *Journal of Computational Physics*, **226** (2007), 897-924.
- [12] Kupradze V.D., Gegelia T.G., Bsheleishvili M.O., and Burkuladze T.V. *Three-dimensional problems of mathematical elasticity theory*. 1976, Nauka, Moscow (in Russian).
- [13] J. Ophir, S. Alam, B. Garra et al. Elastography: Imaging the elastic properties of soft tissues with ultrasound. *J. Med. Ultrasonics*, **29** (2002), 155-171.
- [14] V. Piluso and G. Rizzano. Random material variability effects on full-strength end-plate beam-to-column joints. *Journal of Constructional Steel Research*, Volume 63 (2007), Issue 5, 658-666.
- [15] Yu. A. Rozanov. F. Sanso. The analysis of the Neumann and the oblique derivative problem: the theory of regularization and its stochastic version. *Journal of Geodesy*, **75** (2001), 391-398.
- [16] Sabelfeld, K.K. *Monte Carlo Methods in Boundary Value Problems*. Springer-Verlag, Berlin – Heidelberg – New York, 1991.
- [17] Sabelfeld, K.K. Expansion of random boundary excitations for elliptic PDEs. *Monte Carlo Methods and Applications*. **13**, N5-6, pp.405-453.

- [18] Sabelfeld, K.K. Evaluation of elastic coefficients from the correlation and spectral tensors in respond to boundary random excitations. Proceed. Intern. Conference on Inverse and Ill-Posed pproblems of mathematical physics. dedicated to professor M.M. Lavrentiev on occation of his 75-th birthday. Novosibirsk, august 21-24, 2007.
- [19] Sabelfeld, K.K. Stokes flows under random boundary velocity excitations. J. Stat. Physics, 2008, DOI 10.1007/s10955-008-9654-4.
- [20] Karl Sabelfeld. Expansion of random boundary excitations for the fractional Laplacian. Journal of Cosmology and Astroparticle Physics, 10 (2008), 004, doi: 10.1088/1475-7516/2008/10/004.
- [21] K. Sabelfeld and I.A. Shalimova. Elastic half-plane under random displacement excitations on the boundary. J. Stat. Physics, vol.132, N 6, 1071-1095.
- [22] R. B. Sowers. Multidimensional reaction-diffusion equation with white-noise boundary perturbations. The Annals of Probability, **22** (1994), N 4, 2071-2121.
- [23] P.D. Spanos and A. Kontsosb. A multiscale Monte Carlo finite element method for determining mechanical properties of polymer nanocomposites. Probabilistic Engineering Mechanics, Volume 23 (2008), Issue 4, 456-470.
- [24] Lei Sun, Changjun Peng, Honglai Liu, and Ying Hu. Analogy in the adsorption of random copolymers and homopolymers at solid-liquid interface: A Monte Carlo simulation study. J. Chem. Phys. 126, 094905 (2007); DOI:10.1063/1.2567301.
- [25] X. Wan and G.E. Karniadakis. Long-term behavior of polynomial chaos in stochastic flow simulations, Comput. Methods Appl. Mech. Engrg., vol. 195 (2006), issues 41-43, 5582-5596.
- [26] X. Frank Xu. A multiscale stochastic finite element method on elliptic problems involving uncertainties. Computer Methods in Applied Mechanics and Engineering, **196** (2007), issues 25-28, 2723-2736.
- [27] Dongbin Xiu, George Em Karniadakis. The Wiener–Askey Polynomial Chaos for Stochastic Differential Equations. SIAM Journal on Scientific Computing, vol. 24 (2002), 2, 619 - 644.
- [28] D. Xiu and J. Shen. An efficient spectral method for acoustic scattering from rough surfaces. Communications in computational physics, **2** (2007), N 1, 54-72.
- [29] A.M. Yaglom. Correlation theory of stationary and related random functions I. Basic results. Springer-Verlag, New York - Heidelberg - Berlin, 1987.